



HELIOS 1 Module

LP4036.771-US

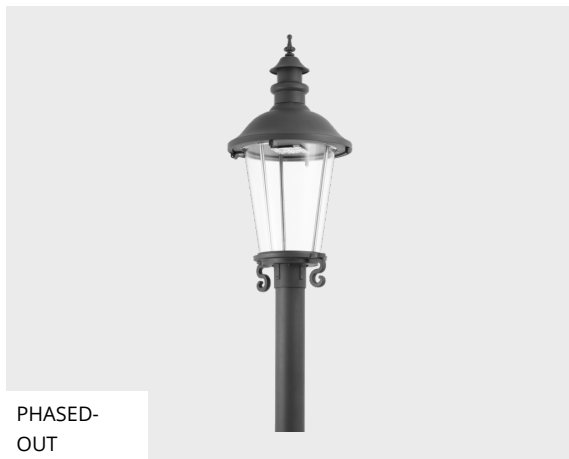

PHASED-OUT

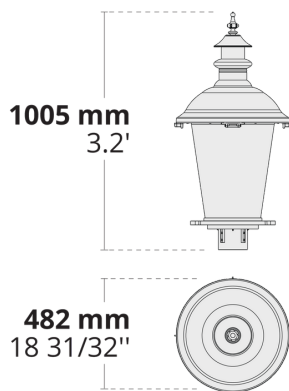

[SYM-3L]

Symmetric, Special effect: 3 lines - 360x65°

Configurations

Light distribution	[SYM-3L] 360x65°
Delivered lumens flux	3990 - 4200 lm
Rated input power	38 W
Color temperature	3000 K CRI 70, 4000 K CRI 70
BUG rating	B3-U0-G1
Lifetime L90 (hour)	>108,000
Lifetime L80 (hour)	>108,000

Options








Control	On/Off, 0-10V
Product colors	

Technical information

Mounting	Direct pole or side bracket mountable. Tenon: Ø2 1/4" x 4"
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffuser	Custom Design PMMA Diffuser
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.24 m²
Weight	4.86 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Notes	Please contact the sales department regarding this product's availability.

Project name		Type		Quantity	
Date		Note			

LP4036.771-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM-3L] Symmetric, Special effect: 3 lines - 360x65°	[700] 38 W	[730] 3000 K CRI 70 [740] 4000 K CRI 70	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LP4036.771-US-SYM-3L-700-730	[SYM-3L] Symmetric, Special effect: 3 lines - 360x65°	3990 lm	38 W	3000 K CRI 70	On/Off, 0-10V
LP4036.771-US-SYM-3L-700-740	[SYM-3L] Symmetric, Special effect: 3 lines - 360x65°	4200 lm	38 W	4000 K CRI 70	On/Off, 0-10V