


# URBAN UNITS V3 Top Module, 360°, 2 Module

LP4054.844-US

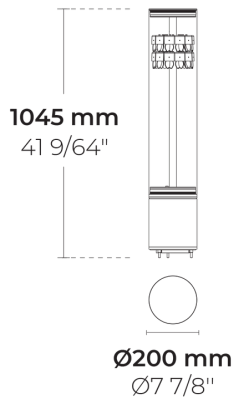

[SYM]  
Symmetric - 118°

## Configurations

<b>Light distribution</b>	[SYM] 118°
<b>Delivered lumens flux</b>	4035 - 4940 lm
<b>Rated input power</b>	52 W
<b>Color temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
<b>BUG rating</b>	B2-U0-G1
<b>Lifetime L90 (hour)</b>	>60, 000
<b>Lifetime L80 (hour)</b>	>60, 000

## Options

<b>Control</b>	On/Off, 0-10V
<b>Product colors</b>	

## Extras

<b>Luminaire body options</b>	Double powder coating
-------------------------------	-----------------------

## Technical information

<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffusor</b>	UV stable, bio-based polycarbonate diffusor
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	28.2 lbs
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	6/6 kV
<b>Power factor</b>	> 0.95
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	8" of flexible power cord

## Poles (Included)

---








### Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø7 7/8"	

Project name		Type		Quantity	
Date		Note			

**LP4054.844-US-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM]</b> Symmetric - 118°	<b>[700]</b> 52 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[0-10V]</b> 0-10V	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				

<b>Configuration code</b>	<b>Light distribution</b>	<b>Delivered lumens flux</b>	<b>Rated input power</b>	<b>Color temperature</b>	<b>Control</b>
LP4054.844-US-SYM-700-740	[SYM] Symmetric - 118°	4940 lm	52 W	4000 K CRI 70	On/Off, 0-10V
LP4054.844-US-SYM-700-827	[SYM] Symmetric - 118°	4035 lm	52 W	2700 K CRI 80	On/Off, 0-10V
LP4054.844-US-SYM-700-830	[SYM] Symmetric - 118°	4420 lm	52 W	3000 K CRI 80	On/Off, 0-10V
LP4054.844-US-SYM-700-840	[SYM] Symmetric - 118°	4490 lm	52 W	4000 K CRI 80	On/Off, 0-10V