


URBAN UNITS V3 Top Module, 360°, 4 Module

LP4054.848-US

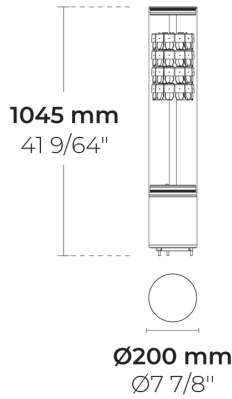

[SYM]
Symmetric - 122°

Configurations

Light distribution	[SYM] 122°
Delivered lumens flux	8282 - 10139 lm
Rated input power	103 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B3-U0-G1
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

Options

Control	On/Off, 0-10V
Product colors	

Extras

Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	34.9 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord

Poles (Included)








Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø7 7/8"	

Project name		Type		Quantity	
Date		Note			

LP4054.848-US-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM] Symmetric - 122°	[700] 103 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras				
Luminaire body options				
[DPC] Double powder coating				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LP4054.848-US-SYM-700-740	[SYM] Symmetric - 122°	10139 lm	103 W	4000 K CRI 70	On/Off, 0-10V
LP4054.848-US-SYM-700-827	[SYM] Symmetric - 122°	8282 lm	103 W	2700 K CRI 80	On/Off, 0-10V
LP4054.848-US-SYM-700-830	[SYM] Symmetric - 122°	9068 lm	103 W	3000 K CRI 80	On/Off, 0-10V
LP4054.848-US-SYM-700-840	[SYM] Symmetric - 122°	9211 lm	103 W	4000 K CRI 80	On/Off, 0-10V