
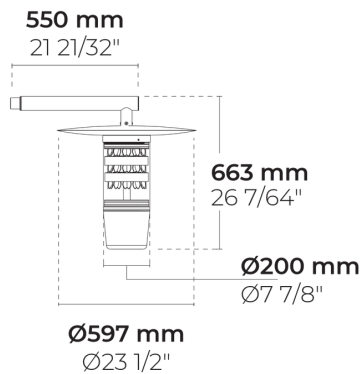


PIRUS Pendant, 360°, 3 Module

LP4076.846-EN

CE UK CA IK08 IP65 

heper⁺



[SYM]
Symmetric - 118°

Variants

Light distribution	[SYM] 118°
Delivered lumens flux	6140 - 7515 lm
Rated input power	78 W
Colour temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B3-U0-G1, B2-U0-G1
Lifetime L90B50 (hour)	>60, 000
Lifetime L80B50 (hour)	>60, 000

Options

Control	On/Off, DALI, AutoDIM, StepDIM
Product colours	

Extras

Consult the factory	120-277V 50/60Hz
----------------------------	------------------

Technical information

Mounting	Post pendant mounting
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	9.91 kg
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com


We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Poles (To be ordered separately)


Conical aluminum poles with flange plate

	Product code	Height	Diameter / Dimensions	Spigot diameter
	PAFK.D114	3m, 4m, 5m m	Ø114mm	Ø60mm, Ø76mm mm
	PAFK.D122	4m, 5m, 6m m	Ø122mm	Ø60mm, Ø76mm mm
	PAFK.D148	6m, 7m, 8m m	Ø148mm	Ø60mm, Ø76mm mm
	PAFK.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø76mm, Ø90mm mm
	PAFK.D180	10m, 8m, 9m m	Ø180mm	Ø76mm, Ø90mm mm
	PAFK.D200	10m, 11m, 12m m	Ø200mm	Ø76mm, Ø90mm mm

Conical aluminum poles with embedded base








	Product code	Height	Diameter / Dimensions	Spigot diameter
	PABK.D114	3m, 4m, 5m m	Ø114mm	Ø60mm, Ø76mm mm
	PABK.D122	4m, 5m, 6m, 7m m	Ø122mm	Ø60mm, Ø76mm mm
	PABK.D148	6m, 7m, 8m m	Ø148mm	Ø60mm, Ø76mm mm
	PABK.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø76mm, Ø90mm mm
	PABK.D180	10m, 8m, 9m m	Ø180mm	Ø76mm, Ø90mm mm
	PABK.D200	10m, 11m, 12m m	Ø200mm	Ø76mm, Ø90mm mm

Cylindrical aluminum poles with flange plate

	Product code	Height	Diameter / Dimensions	Spigot diameter
	PAFC.D114	3m, 4m, 5m m	Ø114mm	Ø114mm mm
	PAFC.D122	3m, 4m, 5m, 6m m	Ø122mm	Ø122mm mm
	PAFC.D148	6m, 7m, 8m m	Ø148mm	Ø148mm mm
	PAFC.D165	6m, 7m, 8m, 9m m	Ø165mm	Ø165mm mm

Project name		Type		Quantity	
Date		Note			

LP4076.846-EN-__-__-__-__-EN-C1-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 118°	[1050] 78 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1]  Black
		[830] 3000 K CRI 80	[DALI] DALI	[HM2]  Dark grey
		[740] 4000 K CRI 70	[AUTO] AutoDIM	[HM3]  Anthracite grey
		[840] 4000 K CRI 80	[STEP] StepDIM	[HM4]  Light grey
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LP4076.846-EN-SYM-1050-740	[SYM] Symmetric - 118°	7515 lm	78 W	4000 K CRI 70	On/Off, DALI, AutoDIM, StepDIM
LP4076.846-EN-SYM-1050-827	[SYM] Symmetric - 118°	6140 lm	78 W	2700 K CRI 80	On/Off, DALI, AutoDIM, StepDIM
LP4076.846-EN-SYM-1050-830	[SYM] Symmetric - 118°	6720 lm	78 W	3000 K CRI 80	On/Off, DALI, AutoDIM, StepDIM
LP4076.846-EN-SYM-1050-840	[SYM] Symmetric - 118°	6825 lm	78 W	4000 K CRI 80	On/Off, DALI, AutoDIM, StepDIM