
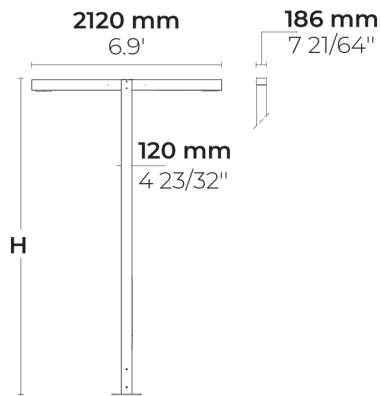


DOMINO ML EVO 2 Module Duo

LP4091.682-EN



[T2]
Type II, Asymmetric,
Side throw - 130x85°

Variants

Light distribution	[T2] 130x85°
Delivered lumens flux	11643 - 14714 lm
Rated input power	136 W
Colour temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B2-U0-G1, B1-U0-G1
Lifetime L90B50 (hour)	>60, 000
Lifetime L80B50 (hour)	>60, 000

Options

Control	On/Off, DALI, AutoDIM, StepDIM
Product colours	
Height	4m, 5m, 6m,

Extras

Light output	Constant light output
Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	53.95 kg (4 m), 59.05 kg (5 m), 59.15 kg (6 m)
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C

Poles (Included)








Product specific poles with flange plate



Variant code	Height	Diameter / Dimensions	Spigot diameter
PAFD.R01.T003-H4	4m	180*120mm	
PAFD.R01.T003-H5	5m	180*120mm	
PAFD.R01.T003-H6	6m	180*120mm	

Project name		Type		Quantity	
Date		Note			

LP4091.682-EN-____-____-____-____-____**-EN-C1-**____-____-____-____-____

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T2] Type II, Asymmetric, Side throw - 130x85°	[700] 136 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1]  Black
		[830] 3000 K CRI 80	[DALI] DALI	[HM2]  Dark grey
		[740] 4000 K CRI 70	[AUTO] AutoDIM	[HM3]  Anthracite grey
		[840] 4000 K CRI 80	[STEP] StepDIM	[HM4]  Light grey
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom colour (Please specify RAL code)
Height	Extras			
[H4] 4m [H5] 5m [H6] 6m [HC]	Light output			
	[CLO] Constant light output			
	Consult the factory			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LP4091.682-EN-T2-700-740	[T2] Type II, Asymmetric, Side throw - 130x85°	13795 lm	136 W	4000 K CRI 70	On/Off, DALI, AutoDIM, StepDIM
LP4091.682-EN-T2-700-827	[T2] Type II, Asymmetric, Side throw - 130x85°	11643 lm	136 W	2700 K CRI 80	On/Off, DALI, AutoDIM, StepDIM
LP4091.682-EN-T2-700-830	[T2] Type II, Asymmetric, Side throw - 130x85°	14714 lm	136 W	4000 K CRI 80	On/Off, DALI, AutoDIM, StepDIM
LP4091.682-EN-T2-700-840	[T2] Type II, Asymmetric, Side throw - 130x85°	11783 lm	136 W	3000 K CRI 80	On/Off, DALI, AutoDIM, StepDIM