


WEDGE

LR9003.531-US



PHASED-
OUT

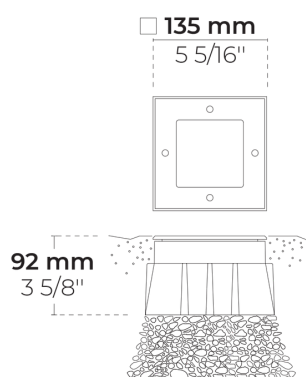

[EL]
Elliptical - 40°

[VN]
Very narrow - NEMA
Type 1 - 10°

Configurations

Light distribution	[EL] 40°, [VN] 10°
Delivered lumens flux	502 - 650 lm
Rated input power	6 W
Color temperature	3000 K CRI 80, 4000 K CRI 70
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000

Options

Control

On/Off

Product colors




Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	4 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheated power cord

Accessories (Included)

Mounting accessories



**Plastic sleeve for
WEDGE**

160401047/6

Accessories (To be ordered separately)

Mounting accessories











**Case removing
vacuum**

160404012

Project name				Type		Quantity	
Date		Note					

LR9003.531-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[EL] Elliptical - 40° [VN] Very narrow - NEMA Type 1 - 10°	[350] 6 W	[830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [9006]  White aluminium (RAL 9006) [CC]  Custom color (Please specify RAL code)
Accessories (Included)	Accessories <i>(To be ordered separately)</i>			
Mounting accessories	Mounting accessories			
[160401047/6] Plastic sleeve for WEDGE	[160404012] Case removing vacuum			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LR9003.531-US-VN-350-740	[VN] Very narrow - NEMA Type 1 - 10°	594 lm	6 W	4000 K CRI 70	On/Off
LR9003.531-US-VN-350-830	[VN] Very narrow - NEMA Type 1 - 10°	502 lm	6 W	3000 K CRI 80	On/Off
LR9003.530-US-ASYM-20x65-350-740	[EL] Elliptical - 40°	650 lm	6 W	4000 K CRI 70	On/Off
LR9003.530-US-ASYM-20x65-350-830	[EL] Elliptical - 40°	550 lm	6 W	3000 K CRI 80	On/Off