



# WEDGE

LR9003.531-US

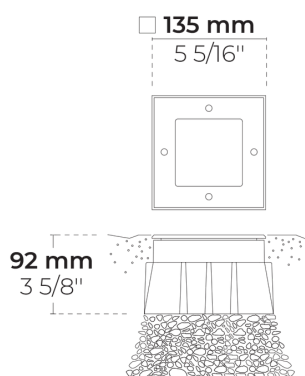

PHASED-OUT

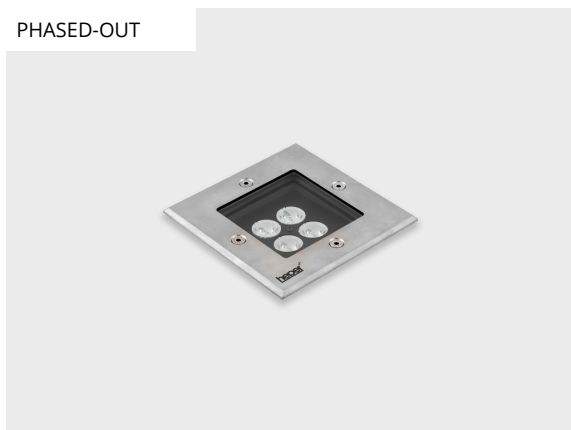

[EL]  
Elliptical - 40°



[VN]  
Very narrow - NEMA  
Type 1 - 10°

## Configurations

<b>Light distribution</b>	[EL] 40°, [VN] 10°
<b>Delivered lumens flux</b>	502 - 650 lm
<b>Rated input power</b>	6 W
<b>Color temperature</b>	3000 K CRI 80, 4000 K CRI 70
<b>Lifetime L90 (hour)</b>	>145,000
<b>Lifetime L80 (hour)</b>	>145,000

## Options


<b>Control</b>	On/Off
<b>Product colors</b>	

## Technical information

<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP67
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	4 lbs
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	3/3 kV
<b>Power factor</b>	> 0.40
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	12" of rubber-sheated power cord

## Accessories (Included)

Mounting accessories



**Plastic sleeve for  
WEDGE**

160401047/6

## Accessories (To be ordered separately)

Mounting accessories











**Case removing  
vacuum**

160404012

Project name		Type		Quantity	
Date		Note			

**LR9003.531-US-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[EL]</b> Elliptical - 40°  <b>[VN]</b> Very narrow - NEMA Type 1 - 10°	<b>[350]</b> 6 W	<b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[9006]</b>  White aluminium (RAL 9006)  <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Accessories (Included)</b>	<b>Accessories (To be ordered separately)</b>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[160401047/6]</b> Plastic sleeve for WEDGE	<b>[160404012]</b> Case removing vacuum			

<b>Configuration code</b>	<b>Light distribution</b>	<b>Delivered lumens flux</b>	<b>Rated input power</b>	<b>Color temperature</b>	<b>Control</b>
LR9003.531-US-VN-350-740	[VN] Very narrow - NEMA Type 1 - 10°	594 lm	6 W	4000 K CRI 70	On/Off
LR9003.531-US-VN-350-830	[VN] Very narrow - NEMA Type 1 - 10°	502 lm	6 W	3000 K CRI 80	On/Off
LR9003.530-US-ASYM-20x65-350-740	[EL] Elliptical - 40°	650 lm	6 W	4000 K CRI 70	On/Off
LR9003.530-US-ASYM-20x65-350-830	[EL] Elliptical - 40°	550 lm	6 W	3000 K CRI 80	On/Off