
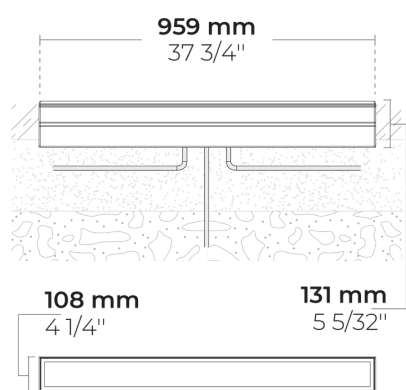


# ZETA 12 Dyno

LR9012.584-EN

CE UK CA IK08 IP67 

**heper**<sup>+</sup>

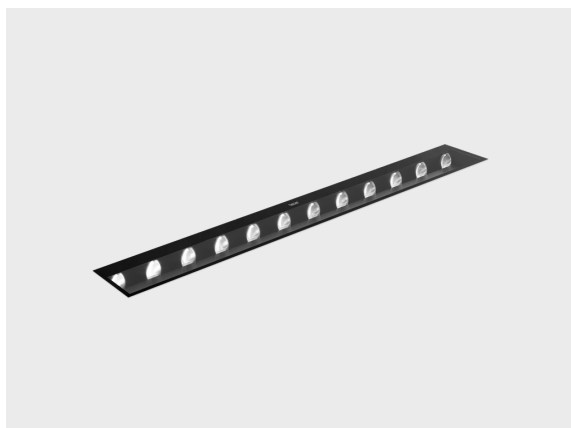

[WW]

Wall-wash - 45x85°

## Variants

<b>Light distribution</b>	[WW] 45x85°
<b>Delivered lumens flux</b>	2388 - 2799 lm
<b>Rated input power</b>	30 W
<b>Colour temperature</b>	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
<b>Lifetime L90B50 (hour)</b>	>42,000
<b>Lifetime L80B50 (hour)</b>	>42,000

## Options

<b>Control</b>	On/Off, DALI
<b>Product colours</b>	

## Technical information

<b>Mounting</b>	Ground recessed mountable
<b>Housing</b>	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	High reflectance aluminium coating, multifaceted micro reflector
<b>Glass / Diffuser</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP67
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	7.88 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	4/4 kV
<b>Power factor</b>	> 0.97
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	0.3 m of rubber-sheated cable

## Accessories (Included)

### Mounting accessories



**Aluminium case  
for ZETA 12 Dyno /  
MOLTO 6 Hybrid**

007500402

## Accessories (To be ordered separately)


### Mounting accessories



**Case removing  
vacuum**

160404012


### Mounting accessories



**Connector set - 5-  
pole**

141407400


### Mounting accessories



**Junction Box**

141901135

Project name		Type		Quantity	
Date		Note			
<b>LR9012.584-EN-__-__-__-__-EN-C1-__</b>					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[WW]</b> Wall-wash - 45x85°	<b>[350]</b> 30 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[DALI]</b> DALI	<b>[SS]</b> Stainless steel 
<b>Accessories (Included)</b>	<b>Accessories (To be ordered separately)</b>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[007500402]</b> Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	<b>[160404012]</b> Case removing vacuum  <b>[141407400]</b> Connector set - 5-pole  <b>[141901135]</b> Junction Box			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LR9012.584-EN-WW-350-740	[WW] Wall-wash - 45x85°	2799 lm	30 W	4000 K CRI 70	On/Off, DALI
LR9012.584-EN-WW-350-827	[WW] Wall-wash - 45x85°	2388 lm	30 W	2700 K CRI 80	On/Off, DALI
LR9012.584-EN-WW-350-830	[WW] Wall-wash - 45x85°	2463 lm	30 W	3000 K CRI 80	On/Off, DALI
LR9012.584-EN-WW-350-840	[WW] Wall-wash - 45x85°	2649 lm	30 W	4000 K CRI 80	On/Off, DALI