


MINIKA 2x90°

LR9014.515-2x90-US

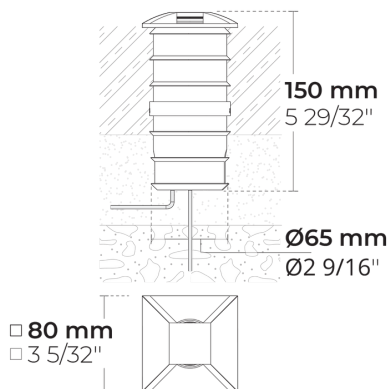

[C2-90]

Controlled, 2 sides,
2x90° - 180x50°

Configurations

Light distribution	[C2-90] 180x50°
Delivered lumens flux	12 - 14 lm
Rated input power	1.7 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>102, 000
Lifetime L80 (hour)	>102, 000

Options

Control	On/Off
Product colors	

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	1.45 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheated power cord


Accessories (Included)

Mounting accessories Mounting accessories



Connector set - 5-pole

141407400










Plastic case for MINIMO/MINIKA

160401101

Project name		Type		Quantity	
Date		Note			

LR9014.515-2x90-US-__-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[C2-90] Controlled, 2 sides, 2x90° - 180x50°	[350] 1.7 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Accessories <i>(Included)</i>				
Mounting accessories				
[141407400] Connector set - 5-pole [160401101] Plastic case for MINIMO/MINIKA				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LR9014.515-2x90-US-C2-350-740	[C2-90] Controlled, 2 sides, 2x90° - 180x50°	14 lm	1.7 W	4000 K CRI 70	On/Off
LR9014.515-2x90-US-C2-350-827	[C2-90] Controlled, 2 sides, 2x90° - 180x50°	12 lm	1.7 W	2700 K CRI 80	On/Off
LR9014.515-2x90-US-C2-350-830	[C2-90] Controlled, 2 sides, 2x90° - 180x50°	12 lm	1.7 W	3000 K CRI 80	On/Off
LR9014.515-2x90-US-C2-350-840	[C2-90] Controlled, 2 sides, 2x90° - 180x50°	12 lm	1.7 W	4000 K CRI 80	On/Off