
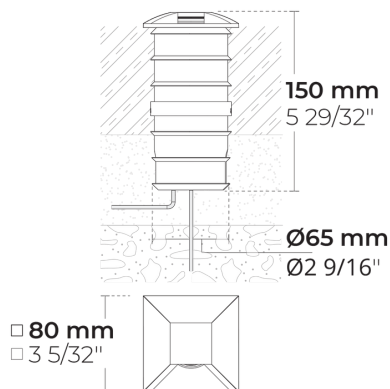


MINIKA 90°

LR9014.515-90-US

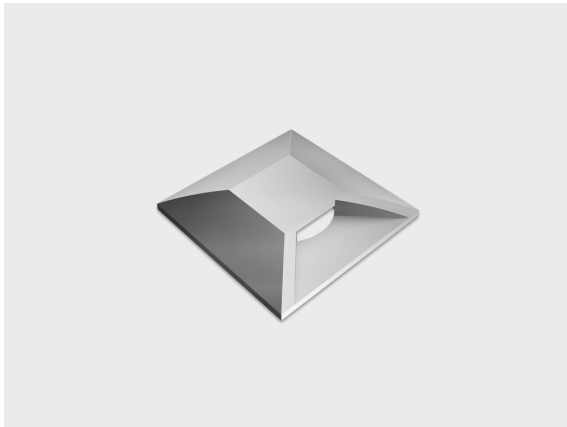

[C1-90]

Controlled, 1 side,
90° - 90x50°

Configurations

Light distribution	[C1-90] 90x50°
Delivered lumens flux	7 - 8 lm
Rated input power	1.7 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>102, 000
Lifetime L80 (hour)	>102, 000

Options


Control	On/Off
Product colors	

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	1.45 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheated power cord

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Project name				Type		Quantity	
Date		Note					

LR9014.515-90-US-

Light distribution	Rated input power	Color temperature	Control	Product colors
[C1-90] Controlled, 1 side, 90° - 90x50°	[350] 1.7 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	<div> [HM1] <div></div> Black </div> <div> [HM2] <div></div> Dark gray </div> <div> [HM3] <div></div> Anthracite gray </div> <div> [HM4] <div></div> Light gray </div> <div> [HM5] <div></div> White </div> <div> [HM6] <div></div> Bronze </div> <div> [CC] <div></div> Custom color (Please specify RAL code) </div>

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LR9014.515-90-US-C1-350-740	[C1-90] Controlled, 1 side, 90° - 90x50°	8 lm	1.7 W	4000 K CRI 70	On/Off
LR9014.515-90-US-C1-350-827	[C1-90] Controlled, 1 side, 90° - 90x50°	7 lm	1.7 W	2700 K CRI 80	On/Off
LR9014.515-90-US-C1-350-830	[C1-90] Controlled, 1 side, 90° - 90x50°	7 lm	1.7 W	3000 K CRI 80	On/Off
LR9014.515-90-US-C1-350-840	[C1-90] Controlled, 1 side, 90° - 90x50°	7 lm	1.7 W	4000 K CRI 80	On/Off