



# MINIMO 120°

LR9015.515-120-EN



IK10 IP67

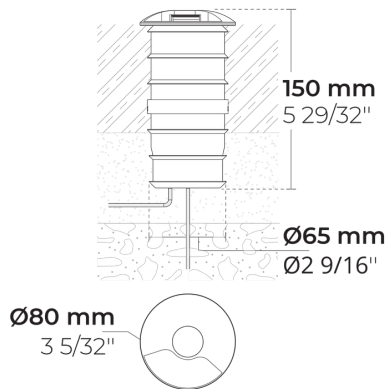

[C1-120]

Controlled, 1 side,  
120° - 120x38°

## Variants

Light distribution	[C1-120] 120x38°
Delivered lumens flux	8 - 10 lm
Rated input power	1.7 W
Colour temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

## Options

Control	On/Off
Product colours	

## Extras


Consult the factory	120-277V 50/60Hz
Luminaire body options	Stainless steel housing

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	0.6 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.60
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.3 m of rubber-sheated cable

## Accessories (Included)

Mounting accessories



**Junction Box for  
MINIMO-MINIKA**

141901034

Mounting accessories




**Plastic case for  
MINIMO/MINIKA**

160401101

## Accessories (To be ordered separately)

Mounting accessories










**Connector set - 5-  
pole**

141407400

Project name				Type		Quantity	
Date		Note					

**LR9015.515-120-EN-\_\_-\_\_-\_\_-\_\_-EN-C1-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[C1-120]</b> Controlled, 1 side, 120° - 120x38°	<b>[350]</b> 1.7 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black  <b>[HM2]</b>  Dark grey  <b>[HM3]</b>  Anthracite grey  <b>[HM4]</b>  Light grey  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom colour (Please specify RAL code)
<b>Extras</b>	<b>Accessories (Included)</b>	<b>Accessories (To be ordered separately)</b>		
<b>Consult the factory</b>	<b>Mounting accessories</b>	<b>Mounting accessories</b>		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[141901034]</b> Junction Box for MINIMO-MINIKA	<b>[141407400]</b> Connector set - 5-pole		
<b>Luminaire body options</b>				
<b>[SS]</b> Stainless steel housing	<b>[160401101]</b> Plastic case for MINIMO/MINIKA			

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LR9015.515-120-EN-C1-350-740	[C1-120] Controlled, 1 side, 120° - 120x38°	10 lm	1.7 W	4000 K CRI 70	On/Off
LR9015.515-120-EN-C1-350-827	[C1-120] Controlled, 1 side, 120° - 120x38°	8 lm	1.7 W	2700 K CRI 80	On/Off
LR9015.515-120-EN-C1-350-830	[C1-120] Controlled, 1 side, 120° - 120x38°	8 lm	1.7 W	3000 K CRI 80	On/Off
LR9015.515-120-EN-C1-350-840	[C1-120] Controlled, 1 side, 120° - 120x38°	8 lm	1.7 W	4000 K CRI 80	On/Off