


ZEROX S Dyno

LR9016.521-US

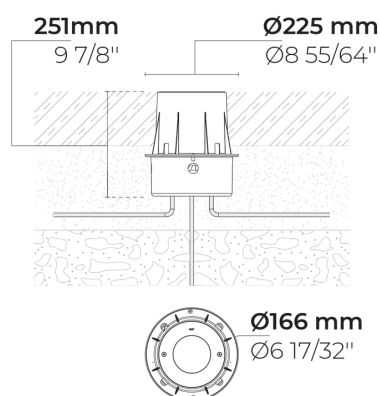

[WW]

Wall-wash - 46x25°

Configurations

Light distribution	[WW] 46x25°
Delivered lumens flux	294 - 345 lm
Rated input power	4 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>42, 000
Lifetime L80 (hour)	>42, 000

Options

Control	On/Off
Product colors	

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffuser	Tempered safety glass
Impact protection	IK10
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	6.1 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories



Connector set - 5-pole

141407400

Accessories (To be ordered separately)


Mounting accessories



Case removing vacuum

160404012

Mounting accessories




Plastic case for ZEROX S

007502091

Project name				Type		Quantity	
Date		Note					

LR9016.521-US-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[WW] Wall-wash - 46x25°	[350] 4 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel 
Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>			
Mounting accessories	Mounting accessories			
[141407400] Connector set - 5-pole	[160404012] Case removing vacuum [007502091] Plastic case for ZEROX S			

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LR9016.521-US-WW-350-740	[WW] Wall-wash - 46x25°	345 lm	4 W	4000 K CRI 70	On/Off
LR9016.521-US-WW-350-827	[WW] Wall-wash - 46x25°	294 lm	4 W	2700 K CRI 80	On/Off
LR9016.521-US-WW-350-830	[WW] Wall-wash - 46x25°	303 lm	4 W	3000 K CRI 80	On/Off
LR9016.521-US-WW-350-840	[WW] Wall-wash - 46x25°	326 lm	4 W	4000 K CRI 80	On/Off