


# ZEROX M Dyno

LR9017.522-EN



IK10 IP67

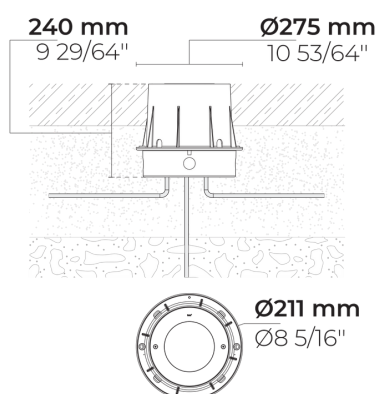

[WW]

Wall-wash - 35x28°

## Variants

|                               |  |
|-------------------------------|--|
| <b>Light distribution</b>     | [WW] 35x28°  |
| <b>Delivered lumens flux</b>  | 448 - 525 lm   |
| <b>Rated input power</b>      | 5 W  |
| <b>Colour temperature</b>     | 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80 |
| <b>Lifetime L90B50 (hour)</b> | >42,000  |
| <b>Lifetime L80B50 (hour)</b> | >42,000  |

## Options

|                        |              |
|------------------------|--------------|
| <b>Control</b>         | On/Off, DALI |
| <b>Product colours</b> |              |

## Extras

|                            |                  |
|----------------------------|------------------|
| <b>Consult the factory</b> | 120-277V 50/60Hz |
|----------------------------|------------------|

## Technical information

|                                |   |
|--------------------------------|---|
| <b>Mounting</b>                | Ground recessed mountable   |
| <b>Housing</b>                 | Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade) |
| <b>Fasteners</b>               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| <b>Gasket</b>                  | Silicone  |
| <b>Lens / Reflector</b>        | High reflectance aluminium coating, multifaceted micro reflector          |
| <b>Glass / Diffuser</b>        | Tempered safety glass   |
| <b>Impact protection</b>       | IK10  |
| <b>Ingress protection</b>      | IP67  |
| <b>Input voltage</b>           | 220-240V 50/60Hz  |
| <b>Insulation class</b>        | Class I   |
| <b>Weight</b>                  | 4.06 kg   |
| <b>LED module</b>              | High power LEDs on metal-core PCB   |
| <b>Driver</b>                  | Internal LED driver   |
| <b>Driver surge protection</b> | 3/3 kV  |
| <b>Power factor</b>            | > 0.40  |
| <b>Through wiring</b>          | Single cable entry  |
| <b>Operating temperature</b>   | -40...50°C  |
| <b>Cable</b>                   | 0.3 m of rubber-sheathed cable  |

## Accessories (To be ordered separately)

---


Mounting accessories



**Case removing vacuum**

160404012


Mounting accessories



**Connector set - 5-pole**

141407400

Mounting accessories



**Junction Box**

141901135


Mounting accessories



**Plastic case for ZEROX M**

007502092

|  |  |      |  |          |  |
|--|--|------|--|----------|--|
| Project name                                 |  | Type |  | Quantity |  |
| Date   |  | Note |  |          |  |
| <b>LR9017.522-EN-__-__-__-__-EN-C1-__-__</b> |  |      |  |          |  |

| Light distribution                | Rated input power   | Colour temperature   | Control   | Product colours  |
|-----------------------------------|---------------------|--|---|--|
| <b>[WW]</b><br>Wall-wash - 35x28° | <b>[350]</b><br>5 W | <b>[827]</b><br>2700 K CRI 80<br><br><b>[830]</b><br>3000 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70<br><br><b>[840]</b><br>4000 K CRI 80 | <b>[ONOFF]</b><br>On/Off<br><br><b>[DALI]</b><br>DALI | <b>[SS]</b><br>Stainless steel  |

|                                  |  |
|----------------------------------|--|
| <b>Extras</b>                    | <b>Accessories (<i>To be ordered separately</i>)</b>   |
| <b>Consult the factory</b>       | <b>Mounting accessories</b>  |
| <b>[UNI]</b><br>120-277V 50/60Hz | <b>[160404012]</b><br>Case removing vacuum<br><br><b>[141407400]</b><br>Connector set - 5-pole<br><br><b>[141901135]</b><br>Junction Box<br><br><b>[007502092]</b><br>Plastic case for ZEROX M |

| Variant code             | Light distribution      | Delivered lumens flux | Rated input power | Colour temperature | Control      |
|--------------------------|-------------------------|-----------------------|-------------------|--------------------|--------------|
| LR9017.522-EN-WW-350-740 | [WW] Wall-wash - 35x28° | 525 lm                | 5 W               | 4000 K CRI 70      | On/Off, DALI |
| LR9017.522-EN-WW-350-827 | [WW] Wall-wash - 35x28° | 448 lm                | 5 W               | 2700 K CRI 80      | On/Off, DALI |
| LR9017.522-EN-WW-350-830 | [WW] Wall-wash - 35x28° | 462 lm                | 5 W               | 3000 K CRI 80      | On/Off, DALI |
| LR9017.522-EN-WW-350-840 | [WW] Wall-wash - 35x28° | 497 lm                | 5 W               | 4000 K CRI 80      | On/Off, DALI |