

SOLE ML EVO 2 Module


LS0002.682-EN



IK08 IP66



PHASED-OUT

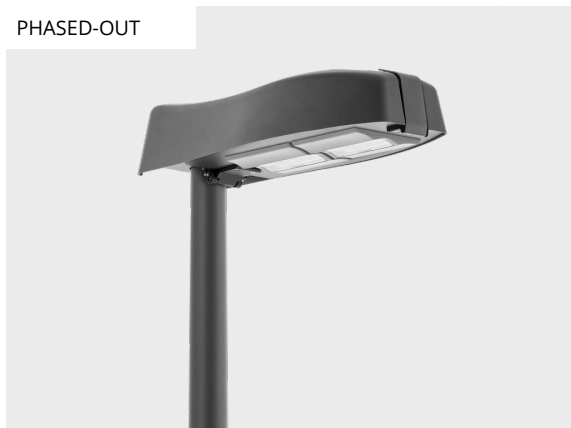

[T2]

Type II, Asymmetric,
Side throw - 130x85°

Variants

Light distribution	[T2] 130x85°
Delivered lumens flux	7394 - 7950 lm
Rated input power	68 W
Colour temperature	3000 K CRI 80, 4000 K CRI 70
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Control	On/Off, DALI
Product colours	

Extras








External surge protection	10 kV
Consult the factory	120-277V 50/60Hz
Luminaire body options	Double powder coating

Technical information

Mounting	Direct pole or side bracket mountable. Spigot: Ø60 mm x 100 mm
Tilt angle	+15°/-15°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	EPDM gasket (Shore A 20-25)
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.15 m ²
Weight	6.65 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Project name		Type		Quantity	
Date		Note			

LS0002.682-EN-____-____-____-____**-EN-C1-**____-____-____-____

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T2] Type II, Asymmetric, Side throw - 130x85°	[700] 68 W	[830] 3000 K CRI 80 [740] 4000 K CRI 70	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)

Extras
External surge protection
[SP10] 10 kV
Consult the factory
[UNI] 120-277V 50/60Hz
Luminaire body options
[DPC] Double powder coating

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LS0002.682-EN-T2-700-740	[T2] Type II, Asymmetric, Side throw - 130x85°	7950 lm	68 W	4000 K CRI 70	On/Off, DALI
LS0002.682-EN-T2-700-830	[T2] Type II, Asymmetric, Side throw - 130x85°	7394 lm	68 W	3000 K CRI 80	On/Off, DALI