




NOX 32 LED

LT1010.761-EN


CE UK CA IK10 IP66



NEW

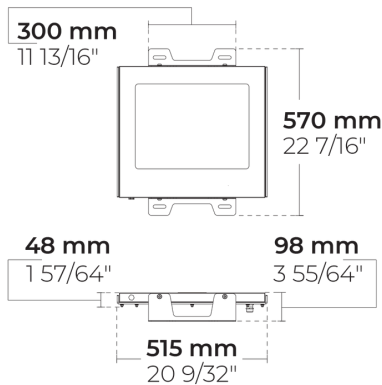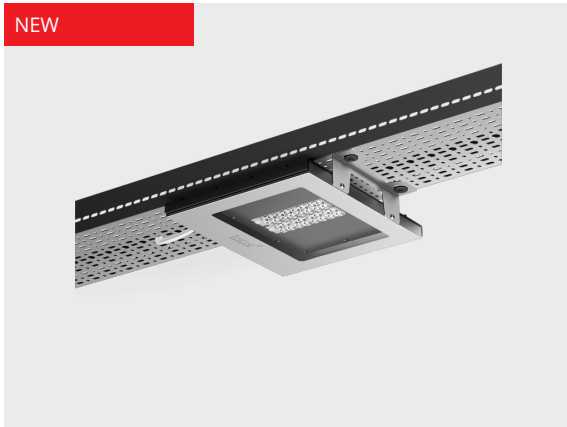

[T-ASYM-A]
Tunnel, Asymmetric,
Type A -



[T-ASYM-B]
Tunnel, Asymmetric,
Type B -



[T-CB-A]
Tunnel, Counter
beam, Type A -



[T-CB-D]
Tunnel, Counter
beam, Type D -



[T-CB-E]
Tunnel, Counter
beam, Type E -



[T-SYM-A]
Tunnel, Symmetric,
Type A -



[T-SYM-B]
Tunnel, Symmetric,
Type B -

Variants

Light distribution	[T-ASYM-A], [T-ASYM-B], [T-CB-A], [T-CB-D], [T-CB-E], [T-SYM-A], [T-SYM-B]
Delivered lumens flux	4309 - 9843 lm
Rated input power	35 - 68 W
Colour temperature	3000 K CRI 70, 4000 K CRI 70
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Product colours



Extras

Light output	Constant light output
Consult the factory	Class II, 120-277V 50/60Hz

Technical information

Mounting	Standard strap connection.
Housing	Corrosion resistant stainless steel housing (AISI 316 / EN 1.4401 grade) combined with aluminum alloy heatsink
Finishing	Polished stainless steel, anodized aluminum
Fasteners	Stainless steel (AISI 316 / EN 1.4401 grade)
Gasket	EPDM gasket (Shore A 25-30)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	10.50 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of halogen-free cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Mounting accessories



**Control gear box S
for NOX family**

007502100


Mounting accessories



**Control gear box
M for NOX family**

007502102


Mounting accessories



**Control gear box L
for NOX family**

007502104

Mounting accessories




**Preassembled
cables and 3-pole
connector set for
NOX**

007502167

Project name		Type		Quantity	
Date		Note			

LT1010.761-EN-__-__-__-__-EN-C1-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T-ASYM-A] Tunnel, Asymmetric, Type A [T-ASYM-B] Tunnel, Asymmetric, Type B [T-CB-A] Tunnel, Counter beam, Type A [T-CB-D] Tunnel, Counter beam, Type D [T-CB-E] Tunnel, Counter beam, Type E [T-SYM-A] Tunnel, Symmetric, Type A [T-SYM-B] Tunnel, Symmetric, Type B	[350] 35 W [500] 48 W [700] 68 W	[730] 3000 K CRI 70 [740] 4000 K CRI 70		[SS]  Stainless steel
Extras	Accessories (<i>To be ordered separately</i>)			
Light output	Mounting accessories			
[CLO] Constant light output Consult the factory	[007502100] Control gear box S for NOX family [007502102] Control gear box M for NOX family [007502104] Control gear box L for NOX family [007502167] Preassembled cables and 3-pole connector set for NOX			
[C2] Class II [UNI] 120-277V 50/60Hz				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LT1010.761-EN-T-ASYM-A-350-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	4387 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-ASYM-A-350-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	4672 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-ASYM-A-500-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	6475 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-ASYM-A-500-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	6850 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-ASYM-A-700-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	8978 lm	68 W	4000 K CRI 70	
LT1010.761-EN-T-ASYM-B-350-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	4404 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-ASYM-B-350-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	4691 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-ASYM-B-500-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	6500 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-ASYM-B-500-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	6876 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-ASYM-B-700-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	8383 lm	68 W	3000 K CRI 70	
LT1010.761-EN-T-ASYM-B-700-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	9013 lm	68 W	4000 K CRI 70	
LT1010.761-EN-T-CB-A-350-730	[T-CB-A] Tunnel, Counter beam, Type A	4614 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-CB-A-350-740	[T-CB-A] Tunnel, Counter beam, Type A	4914 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-CB-A-500-730	[T-CB-A] Tunnel, Counter beam, Type A	6809 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-CB-A-500-740	[T-CB-A] Tunnel, Counter beam, Type A	7204 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-CB-A-700-730	[T-CB-A] Tunnel, Counter beam, Type A	8782 lm	68 W	3000 K CRI 70	
LT1010.761-EN-T-CB-A-700-740	[T-CB-A] Tunnel, Counter beam, Type A	9442 lm	68 W	4000 K CRI 70	
LT1010.761-EN-T-CB-D-350-730	[T-CB-D] Tunnel, Counter beam, Type D	4309 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-CB-D-350-740	[T-CB-D] Tunnel, Counter beam, Type D	4636 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-CB-D-500-730	[T-CB-D] Tunnel, Counter beam, Type D	6359 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-CB-D-500-740	[T-CB-D] Tunnel, Counter beam, Type D	6796 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-CB-D-700-730	[T-CB-D] Tunnel, Counter beam, Type D	9155 lm	68 W	3000 K CRI 70	
LT1010.761-EN-T-CB-D-700-740	[T-CB-D] Tunnel, Counter beam, Type D	9843 lm	68 W	4000 K CRI 70	
LT1010.761-EN-T-CB-E-350-730	[T-CB-E] Tunnel, Counter beam, Type E	4425 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-CB-E-350-740	[T-CB-E] Tunnel, Counter beam, Type E	4713 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-CB-E-500-730	[T-CB-E] Tunnel, Counter beam, Type E	6531 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-CB-E-500-740	[T-CB-E] Tunnel, Counter beam, Type E	6909 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-CB-E-700-730	[T-CB-E] Tunnel, Counter beam, Type E	8423 lm	68 W	3000 K CRI 70	
LT1010.761-EN-T-CB-E-700-740	[T-CB-E] Tunnel, Counter beam, Type E	9056 lm	68 W	4000 K CRI 70	
LT1010.761-EN-T-SYM-A-350-730	[T-SYM-A] Tunnel, Symmetric, Type A	4370 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-SYM-A-350-740	[T-SYM-A] Tunnel, Symmetric, Type A	4655 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-SYM-A-500-730	[T-SYM-A] Tunnel, Symmetric, Type A	6450 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-SYM-A-500-740	[T-SYM-A] Tunnel, Symmetric, Type A	6824 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-SYM-A-700-730	[T-SYM-A] Tunnel, Symmetric, Type A	8295 lm	68 W	3000 K CRI 70	
LT1010.761-EN-T-SYM-A-700-740	[T-SYM-A] Tunnel, Symmetric, Type A	8925 lm	68 W	4000 K CRI 70	
LT1010.761-EN-T-SYM-B-350-730	[T-SYM-B] Tunnel, Symmetric, Type B	4320 lm	35 W	3000 K CRI 70	
LT1010.761-EN-T-SYM-B-350-740	[T-SYM-B] Tunnel, Symmetric, Type B	4601 lm	35 W	4000 K CRI 70	
LT1010.761-EN-T-SYM-B-500-730	[T-SYM-B] Tunnel, Symmetric, Type B	6375 lm	48 W	3000 K CRI 70	
LT1010.761-EN-T-SYM-B-500-740	[T-SYM-B] Tunnel, Symmetric, Type B	6744 lm	48 W	4000 K CRI 70	
LT1010.761-EN-T-SYM-B-700-730	[T-SYM-B] Tunnel, Symmetric, Type B	8222 lm	68 W	3000 K CRI 70	

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024.
For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

LT1010.761-EN-T-SYM-B-700-740	[T-SYM-B] Tunnel, Symmetric, Type B	8840 lm	68 W	4000 K CRI 70	
-------------------------------	-------------------------------------	---------	------	---------------	--