




NOX 112 LED

LT1010.766-EN

CE UK CA IK10 IP66

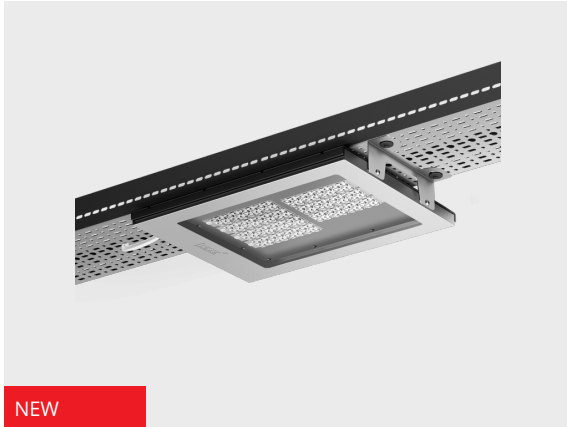


NEW

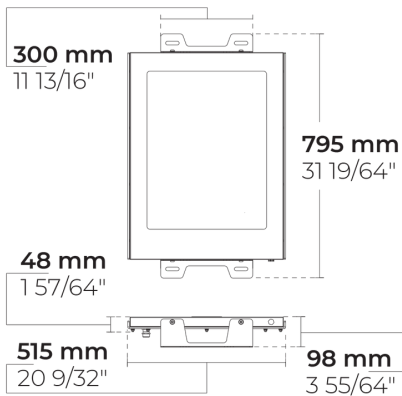

[T-ASYM-A]

Tunnel, Asymmetric,
Type A -



[T-ASYM-B]

Tunnel, Asymmetric,
Type B -



[T-CB-A]

Tunnel, Counter
beam, Type A -



[T-CB-D]

Tunnel, Counter
beam, Type D -



[T-CB-E]

Tunnel, Counter
beam, Type E -



[T-SYM-A]

Tunnel, Symmetric,
Type A -



[T-SYM-B]

Tunnel, Symmetric,
Type B -

Variants

Light distribution	[T-ASYM-A], [T-ASYM-B], [T-CB-A], [T-CB-D], [T-CB-E], [T-SYM-A], [T-SYM-B]
Delivered lumens flux	14273 - 34453 lm
Rated input power	121 - 238 W
Colour temperature	3000 K CRI 70, 4000 K CRI 70
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Product colours



Extras

Light output	Constant light output
Consult the factory	Class II, 120-277V 50/60Hz

Technical information

Mounting	Standard strap connection.
Housing	Corrosion resistant stainless steel housing (AISI 316 / EN 1.4401 grade) combined with aluminum alloy heatsink
Finishing	Polished stainless steel, anodized aluminum
Fasteners	Stainless steel (AISI 316 / EN 1.4401 grade)
Gasket	EPDM gasket (Shore A 25-30)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK10
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	13.40 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of halogen-free cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Mounting accessories



**Control gear box
M for NOX family**

007502102


Mounting accessories



**Control gear box L
for NOX family**

007502104

Mounting accessories




**Preassembled
cables and 5-pole
connector set for
NOX**

007502168

Project name		Type		Quantity	
Date		Note			

LT1010.766-EN-____-____-____-____**-EN-C1-**____-____-____

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T-ASYM-A] Tunnel, Asymmetric, Type A [T-ASYM-B] Tunnel, Asymmetric, Type B [T-CB-A] Tunnel, Counter beam, Type A [T-CB-D] Tunnel, Counter beam, Type D [T-CB-E] Tunnel, Counter beam, Type E [T-SYM-A] Tunnel, Symmetric, Type A [T-SYM-B] Tunnel, Symmetric, Type B	[350] 121 W [500] 167 W [500] 170 W [700] 238 W	[730] 3000 K CRI 70 [740] 4000 K CRI 70		[SS] Stainless steel 
Extras	Accessories (<i>To be ordered separately</i>)			
Light output	Mounting accessories			
[CLO] Constant light output Consult the factory	[007502102] Control gear box M for NOX family [007502104] Control gear box L for NOX family [007502168] Preassembled cables and 5-pole connector set for NOX			
[C2] Class II [UNI] 120-277V 50/60Hz				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LT1010.766-EN-T-ASYM-A-350-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	15355 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-ASYM-A-350-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	14327 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-ASYM-A-500-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	22661 lm	170 W	3000 K CRI 70	
LT1010.766-EN-T-ASYM-A-500-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	23974 lm	170 W	4000 K CRI 70	
LT1010.766-EN-T-ASYM-A-700-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	29225 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-ASYM-A-700-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	31423 lm	238 W	4000 K CRI 70	
LT1010.766-EN-T-ASYM-B-350-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	15415 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-ASYM-B-350-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	16417 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-ASYM-B-500-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	22749 lm	170 W	3000 K CRI 70	
LT1010.766-EN-T-ASYM-B-500-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	24067 lm	170 W	4000 K CRI 70	
LT1010.766-EN-T-ASYM-B-700-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	31545 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-ASYM-B-700-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	29339 lm	238 W	4000 K CRI 70	
LT1010.766-EN-T-CB-A-350-730	[T-CB-A] Tunnel, Counter beam, Type A	16148 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-CB-A-350-740	[T-CB-A] Tunnel, Counter beam, Type A	17199 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-CB-A-500-730	[T-CB-A] Tunnel, Counter beam, Type A	23832 lm	170 W	3000 K CRI 70	
LT1010.766-EN-T-CB-A-500-740	[T-CB-A] Tunnel, Counter beam, Type A	25213 lm	170 W	4000 K CRI 70	
LT1010.766-EN-T-CB-A-700-730	[T-CB-A] Tunnel, Counter beam, Type A	30736 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-CB-A-700-740	[T-CB-A] Tunnel, Counter beam, Type A	33047 lm	238 W	4000 K CRI 70	
LT1010.766-EN-T-CB-D-350-730	[T-CB-D] Tunnel, Counter beam, Type D	15081 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-CB-D-350-740	[T-CB-D] Tunnel, Counter beam, Type D	16224 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-CB-D-500-730	[T-CB-D] Tunnel, Counter beam, Type D	22257 lm	167 W	3000 K CRI 70	
LT1010.766-EN-T-CB-D-500-740	[T-CB-D] Tunnel, Counter beam, Type D	23785 lm	167 W	4000 K CRI 70	
LT1010.766-EN-T-CB-D-700-730	[T-CB-D] Tunnel, Counter beam, Type D	32040 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-CB-D-700-740	[T-CB-D] Tunnel, Counter beam, Type D	34453 lm	238 W	4000 K CRI 70	
LT1010.766-EN-T-CB-E-350-730	[T-CB-E] Tunnel, Counter beam, Type E	15488 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-CB-E-350-740	[T-CB-E] Tunnel, Counter beam, Type E	16496 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-CB-E-500-730	[T-CB-E] Tunnel, Counter beam, Type E	22858 lm	170 W	3000 K CRI 70	
LT1010.766-EN-T-CB-E-500-740	[T-CB-E] Tunnel, Counter beam, Type E	24182 lm	170 W	4000 K CRI 70	
LT1010.766-EN-T-CB-E-700-730	[T-CB-E] Tunnel, Counter beam, Type E	29479 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-CB-E-700-740	[T-CB-E] Tunnel, Counter beam, Type E	31696 lm	238 W	4000 K CRI 70	
LT1010.766-EN-T-SYM-A-350-730	[T-SYM-A] Tunnel, Symmetric, Type A	14273 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-SYM-A-350-740	[T-SYM-A] Tunnel, Symmetric, Type A	16292 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-SYM-A-500-730	[T-SYM-A] Tunnel, Symmetric, Type A	22575 lm	170 W	3000 K CRI 70	
LT1010.766-EN-T-SYM-A-500-740	[T-SYM-A] Tunnel, Symmetric, Type A	23883 lm	170 W	4000 K CRI 70	
LT1010.766-EN-T-SYM-A-700-730	[T-SYM-A] Tunnel, Symmetric, Type A	29030 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-SYM-A-700-740	[T-SYM-A] Tunnel, Symmetric, Type A	31233 lm	238 W	4000 K CRI 70	
LT1010.766-EN-T-SYM-B-350-730	[T-SYM-B] Tunnel, Symmetric, Type B	15119 lm	121 W	3000 K CRI 70	
LT1010.766-EN-T-SYM-B-350-740	[T-SYM-B] Tunnel, Symmetric, Type B	16102 lm	121 W	4000 K CRI 70	
LT1010.766-EN-T-SYM-B-500-730	[T-SYM-B] Tunnel, Symmetric, Type B	22313 lm	170 W	3000 K CRI 70	
LT1010.766-EN-T-SYM-B-500-740	[T-SYM-B] Tunnel, Symmetric, Type B	23605 lm	170 W	4000 K CRI 70	

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024.
For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

LT1010.766-EN-T-SYM-B-700-730	[T-SYM-B] Tunnel, Symmetric, Type B	28776 lm	238 W	3000 K CRI 70	
LT1010.766-EN-T-SYM-B-700-740	[T-SYM-B] Tunnel, Symmetric, Type B	30940 lm	238 W	4000 K CRI 70	