




# NOX 128 LED

LT1010.767-EN

CE UK CA IK10 IP66

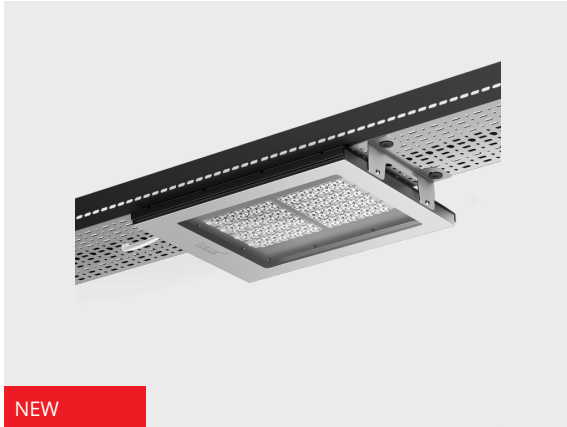


NEW

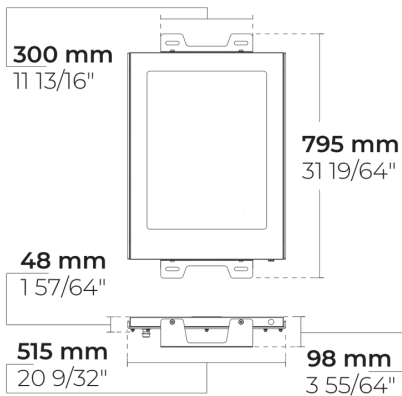

[T-ASYM-A]

Tunnel, Asymmetric,  
Type A -



[T-ASYM-B]

Tunnel, Asymmetric,  
Type B -



[T-CB-A]

Tunnel, Counter  
beam, Type A -



[T-CB-D]

Tunnel, Counter  
beam, Type D -



[T-CB-E]

Tunnel, Counter  
beam, Type E -



[T-SYM-A]

Tunnel, Symmetric,  
Type A -



[T-SYM-B]

Tunnel, Symmetric,  
Type B -

## Variants

<b>Light distribution</b>	[T-ASYM-A], [T-ASYM-B], [T-CB-A], [T-CB-D], [T-CB-E], [T-SYM-A], [T-SYM-B]
<b>Delivered lumens flux</b>	17235 - 39375 lm
<b>Rated input power</b>	138 - 272 W
<b>Colour temperature</b>	3000 K CRI 70, 4000 K CRI 70
<b>Lifetime L90B50 (hour)</b>	>102,000
<b>Lifetime L80B50 (hour)</b>	>102,000

## Options

**Product colours**



## Extras

<b>Light output</b>	Constant light output
<b>Consult the factory</b>	Class II, 120-277V 50/60Hz

## Technical information

<b>Mounting</b>	Standard strap connection.
<b>Housing</b>	Corrosion resistant stainless steel housing (AISI 316 / EN 1.4401 grade) combined with aluminum alloy heatsink
<b>Finishing</b>	Polished stainless steel, anodized aluminum
<b>Fasteners</b>	Stainless steel (AISI 316 / EN 1.4401 grade)
<b>Gasket</b>	EPDM gasket (Shore A 25-30)
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK10
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	13.40 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	External LED driver
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	1 m of halogen-free cable

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---


Mounting accessories



**Control gear box  
M for NOX family**

007502102


Mounting accessories



**Control gear box L  
for NOX family**

007502104

Mounting accessories




**Preassembled  
cables and 5-pole  
connector set for  
NOX**

007502168

Project name		Type		Quantity	
Date		Note			

**LT1010.767-EN-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_**-EN-C1-**\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Colour temperature	Control	Product colours
<p><b>[T-ASYM-A]</b> Tunnel, Asymmetric, Type A</p> <p><b>[T-ASYM-B]</b> Tunnel, Asymmetric, Type B</p> <p><b>[T-CB-A]</b> Tunnel, Counter beam, Type A</p> <p><b>[T-CB-D]</b> Tunnel, Counter beam, Type D</p> <p><b>[T-CB-E]</b> Tunnel, Counter beam, Type E</p> <p><b>[T-SYM-A]</b> Tunnel, Symmetric, Type A</p> <p><b>[T-SYM-B]</b> Tunnel, Symmetric, Type B</p>	<p><b>[350]</b> 138 W</p> <p><b>[500]</b> 193 W</p> <p><b>[700]</b> 272 W</p>	<p><b>[730]</b> 3000 K CRI 70</p> <p><b>[740]</b> 4000 K CRI 70</p>		<p><b>[SS]</b> Stainless steel</p> 
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Light output</b>	<b>Mounting accessories</b>			
<p><b>[CLO]</b> Constant light output</p> <p><b>Consult the factory</b></p>	<p><b>[007502102]</b> Control gear box M for NOX family</p> <p><b>[007502104]</b> Control gear box L for NOX family</p> <p><b>[007502168]</b> Preassembled cables and 5-pole connector set for NOX</p>			
<p><b>[C2]</b> Class II</p> <p><b>[UNI]</b> 120-277V 50/60Hz</p>				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LT1010.767-EN-T-ASYM-A-350-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	17548 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-ASYM-A-350-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	18690 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-ASYM-A-500-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	25898 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-ASYM-A-500-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	27399 lm	193 W	4000 K CRI 70	
LT1010.767-EN-T-ASYM-A-700-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	33400 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-ASYM-A-700-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	35912 lm	272 W	4000 K CRI 70	
LT1010.767-EN-T-ASYM-B-350-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	17617 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-ASYM-B-350-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	18763 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-ASYM-B-500-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	25999 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-ASYM-B-500-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	27506 lm	193 W	4000 K CRI 70	
LT1010.767-EN-T-ASYM-B-700-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	36052 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-ASYM-B-700-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	33531 lm	272 W	4000 K CRI 70	
LT1010.767-EN-T-CB-A-350-730	[T-CB-A] Tunnel, Counter beam, Type A	18455 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-CB-A-350-740	[T-CB-A] Tunnel, Counter beam, Type A	19656 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-CB-A-500-730	[T-CB-A] Tunnel, Counter beam, Type A	27237 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-CB-A-500-740	[T-CB-A] Tunnel, Counter beam, Type A	28815 lm	193 W	4000 K CRI 70	
LT1010.767-EN-T-CB-A-700-730	[T-CB-A] Tunnel, Counter beam, Type A	35127 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-CB-A-700-740	[T-CB-A] Tunnel, Counter beam, Type A	37768 lm	272 W	4000 K CRI 70	
LT1010.767-EN-T-CB-D-350-730	[T-CB-D] Tunnel, Counter beam, Type D	17235 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-CB-D-350-740	[T-CB-D] Tunnel, Counter beam, Type D	18542 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-CB-D-500-730	[T-CB-D] Tunnel, Counter beam, Type D	25437 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-CB-D-500-740	[T-CB-D] Tunnel, Counter beam, Type D	27182 lm	193 W	4000 K CRI 70	
LT1010.767-EN-T-CB-D-700-730	[T-CB-D] Tunnel, Counter beam, Type D	36615 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-CB-D-700-740	[T-CB-D] Tunnel, Counter beam, Type D	39375 lm	272 W	4000 K CRI 70	
LT1010.767-EN-T-CB-E-350-730	[T-CB-E] Tunnel, Counter beam, Type E	17701 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-CB-E-350-740	[T-CB-E] Tunnel, Counter beam, Type E	18852 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-CB-E-500-730	[T-CB-E] Tunnel, Counter beam, Type E	26123 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-CB-E-500-740	[T-CB-E] Tunnel, Counter beam, Type E	27637 lm	193 W	4000 K CRI 70	
LT1010.767-EN-T-CB-E-700-730	[T-CB-E] Tunnel, Counter beam, Type E	33691 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-CB-E-700-740	[T-CB-E] Tunnel, Counter beam, Type E	36224 lm	272 W	4000 K CRI 70	
LT1010.767-EN-T-SYM-A-350-730	[T-SYM-A] Tunnel, Symmetric, Type A	17482 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-SYM-A-350-740	[T-SYM-A] Tunnel, Symmetric, Type A	18619 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-SYM-A-500-730	[T-SYM-A] Tunnel, Symmetric, Type A	25800 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-SYM-A-500-740	[T-SYM-A] Tunnel, Symmetric, Type A	27295 lm	193 W	4000 K CRI 70	
LT1010.767-EN-T-SYM-A-700-730	[T-SYM-A] Tunnel, Symmetric, Type A	33175 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-SYM-A-700-740	[T-SYM-A] Tunnel, Symmetric, Type A	35695 lm	272 W	4000 K CRI 70	
LT1010.767-EN-T-SYM-B-350-730	[T-SYM-B] Tunnel, Symmetric, Type B	17279 lm	138 W	3000 K CRI 70	
LT1010.767-EN-T-SYM-B-350-740	[T-SYM-B] Tunnel, Symmetric, Type B	18403 lm	138 W	4000 K CRI 70	
LT1010.767-EN-T-SYM-B-500-730	[T-SYM-B] Tunnel, Symmetric, Type B	25500 lm	193 W	3000 K CRI 70	
LT1010.767-EN-T-SYM-B-500-740	[T-SYM-B] Tunnel, Symmetric, Type B	26978 lm	193 W	4000 K CRI 70	

**HPR Pazarlama A.Ş.**

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

**HEPER Europe GmbH**

Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.

LT1010.767-EN-T-SYM-B-700-730	[T-SYM-B] Tunnel, Symmetric, Type B	32887 lm	272 W	3000 K CRI 70	
LT1010.767-EN-T-SYM-B-700-740	[T-SYM-B] Tunnel, Symmetric, Type B	35360 lm	272 W	4000 K CRI 70	