
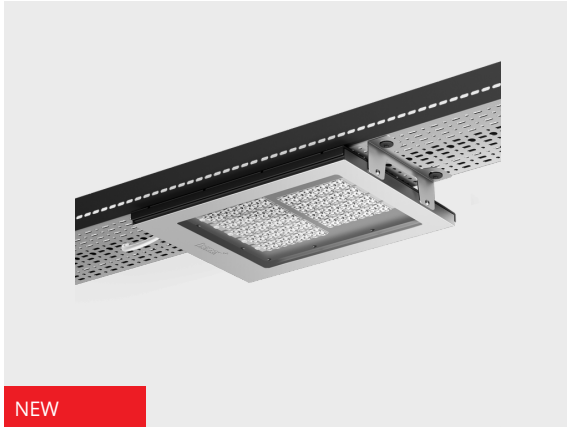




NOX 144 LED

LT1010.768-EN

CE UK CA IK10 IP66 



NEW

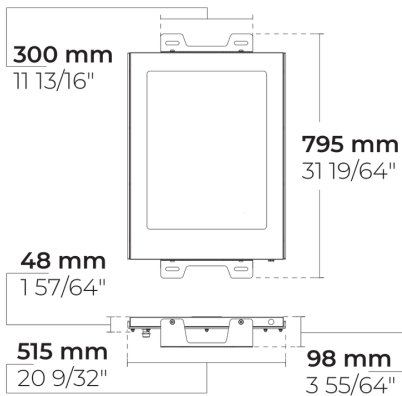

[T-ASYM-A]

Tunnel, Asymmetric,
Type A -



[T-ASYM-B]

Tunnel, Asymmetric,
Type B -



[T-CB-A]

Tunnel, Counter
beam, Type A -



[T-CB-D]

Tunnel, Counter
beam, Type D -



[T-CB-E]

Tunnel, Counter
beam, Type E -



[T-SYM-A]

Tunnel, Symmetric,
Type A -



[T-SYM-B]

Tunnel, Symmetric,
Type B -

Variants

Light distribution	[T-ASYM-A], [T-ASYM-B], [T-CB-A], [T-CB-D], [T-CB-E], [T-SYM-A], [T-SYM-B]
Delivered lumens flux	19390 - 44297 lm
Rated input power	155 - 306 W
Colour temperature	3000 K CRI 70, 4000 K CRI 70
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Product colours



Extras

Light output	Constant light output
Consult the factory	Class II, 120-277V 50/60Hz

Technical information

Mounting	Standard strap connection.
Housing	Corrosion resistant stainless steel housing (AISI 316 / EN 1.4401 grade) combined with aluminum alloy heatsink
Finishing	Polished stainless steel, anodized aluminum
Fasteners	Stainless steel (AISI 316 / EN 1.4401 grade)
Gasket	EPDM gasket (Shore A 25-30)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK10
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	13.40 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of halogen-free cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Mounting accessories



**Control gear box
M for NOX family**

007502102


Mounting accessories



**Control gear box L
for NOX family**

007502104

Mounting accessories




**Preassembled
cables and 5-pole
connector set for
NOX**

007502168

Project name		Type		Quantity	
Date		Note			

LT1010.768-EN-____-____-____-____**-EN-C1-**____-____-____

Light distribution	Rated input power	Colour temperature	Control	Product colours
<p>[T-ASYM-A] Tunnel, Asymmetric, Type A</p> <p>[T-ASYM-B] Tunnel, Asymmetric, Type B</p> <p>[T-CB-A] Tunnel, Counter beam, Type A</p> <p>[T-CB-D] Tunnel, Counter beam, Type D</p> <p>[T-CB-E] Tunnel, Counter beam, Type E</p> <p>[T-SYM-A] Tunnel, Symmetric, Type A</p> <p>[T-SYM-B] Tunnel, Symmetric, Type B</p>	<p>[350] 155 W</p> <p>[500] 217 W</p> <p>[700] 306 W</p>	<p>[730] 3000 K CRI 70</p> <p>[740] 4000 K CRI 70</p>		<p>[SS] Stainless steel</p> 
Extras	Accessories (<i>To be ordered separately</i>)			
Light output	Mounting accessories			
<p>[CLO] Constant light output</p> <p>Consult the factory</p>	<p>[007502102] Control gear box M for NOX family</p> <p>[007502104] Control gear box L for NOX family</p> <p>[007502168] Preassembled cables and 5-pole connector set for NOX</p>			
<p>[C2] Class II</p> <p>[UNI] 120-277V 50/60Hz</p>				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LT1010.768-EN-T-ASYM-A-350-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	19742 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-ASYM-A-350-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	21026 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-ASYM-A-500-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	29136 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-ASYM-A-500-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	30824 lm	217 W	4000 K CRI 70	
LT1010.768-EN-T-ASYM-A-700-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	36532 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-ASYM-A-700-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	40393 lm	306 W	4000 K CRI 70	
LT1010.768-EN-T-ASYM-B-350-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	19819 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-ASYM-B-350-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	21108 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-ASYM-B-500-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	29249 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-ASYM-B-500-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	30944 lm	217 W	4000 K CRI 70	
LT1010.768-EN-T-ASYM-B-700-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	40550 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-ASYM-B-700-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	36674 lm	306 W	4000 K CRI 70	
LT1010.768-EN-T-CB-A-350-730	[T-CB-A] Tunnel, Counter beam, Type A	20762 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-CB-A-350-740	[T-CB-A] Tunnel, Counter beam, Type A	22113 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-CB-A-500-730	[T-CB-A] Tunnel, Counter beam, Type A	30641 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-CB-A-500-740	[T-CB-A] Tunnel, Counter beam, Type A	32417 lm	217 W	4000 K CRI 70	
LT1010.768-EN-T-CB-A-700-730	[T-CB-A] Tunnel, Counter beam, Type A	38420 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-CB-A-700-740	[T-CB-A] Tunnel, Counter beam, Type A	42480 lm	306 W	4000 K CRI 70	
LT1010.768-EN-T-CB-D-350-730	[T-CB-D] Tunnel, Counter beam, Type D	19390 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-CB-D-350-740	[T-CB-D] Tunnel, Counter beam, Type D	20860 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-CB-D-500-730	[T-CB-D] Tunnel, Counter beam, Type D	28616 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-CB-D-500-740	[T-CB-D] Tunnel, Counter beam, Type D	30580 lm	217 W	4000 K CRI 70	
LT1010.768-EN-T-CB-D-700-730	[T-CB-D] Tunnel, Counter beam, Type D	40050 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-CB-D-700-740	[T-CB-D] Tunnel, Counter beam, Type D	44297 lm	306 W	4000 K CRI 70	
LT1010.768-EN-T-CB-E-350-730	[T-CB-E] Tunnel, Counter beam, Type E	19913 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-CB-E-350-740	[T-CB-E] Tunnel, Counter beam, Type E	21209 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-CB-E-500-730	[T-CB-E] Tunnel, Counter beam, Type E	29389 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-CB-E-500-740	[T-CB-E] Tunnel, Counter beam, Type E	31091 lm	217 W	4000 K CRI 70	
LT1010.768-EN-T-CB-E-700-730	[T-CB-E] Tunnel, Counter beam, Type E	36849 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-CB-E-700-740	[T-CB-E] Tunnel, Counter beam, Type E	40744 lm	306 W	4000 K CRI 70	
LT1010.768-EN-T-SYM-A-350-730	[T-SYM-A] Tunnel, Symmetric, Type A	19667 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-SYM-A-350-740	[T-SYM-A] Tunnel, Symmetric, Type A	20946 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-SYM-A-500-730	[T-SYM-A] Tunnel, Symmetric, Type A	29025 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-SYM-A-500-740	[T-SYM-A] Tunnel, Symmetric, Type A	30707 lm	217 W	4000 K CRI 70	
LT1010.768-EN-T-SYM-A-700-730	[T-SYM-A] Tunnel, Symmetric, Type A	37433 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-SYM-A-700-740	[T-SYM-A] Tunnel, Symmetric, Type A	40157 lm	306 W	4000 K CRI 70	
LT1010.768-EN-T-SYM-B-350-730	[T-SYM-B] Tunnel, Symmetric, Type B	19438 lm	155 W	3000 K CRI 70	
LT1010.768-EN-T-SYM-B-350-740	[T-SYM-B] Tunnel, Symmetric, Type B	20703 lm	155 W	4000 K CRI 70	
LT1010.768-EN-T-SYM-B-500-730	[T-SYM-B] Tunnel, Symmetric, Type B	28688 lm	217 W	3000 K CRI 70	
LT1010.768-EN-T-SYM-B-500-740	[T-SYM-B] Tunnel, Symmetric, Type B	30350 lm	217 W	4000 K CRI 70	

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024.
For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

LT1010.768-EN-T-SYM-B-700-730	[T-SYM-B] Tunnel, Symmetric, Type B	35970 lm	306 W	3000 K CRI 70	
LT1010.768-EN-T-SYM-B-700-740	[T-SYM-B] Tunnel, Symmetric, Type B	39772 lm	306 W	4000 K CRI 70	