




NOX 160 LED

LT1010.769-EN

CE UK CA IK10 IP66



NEW

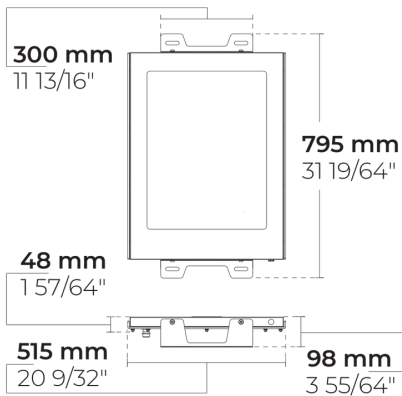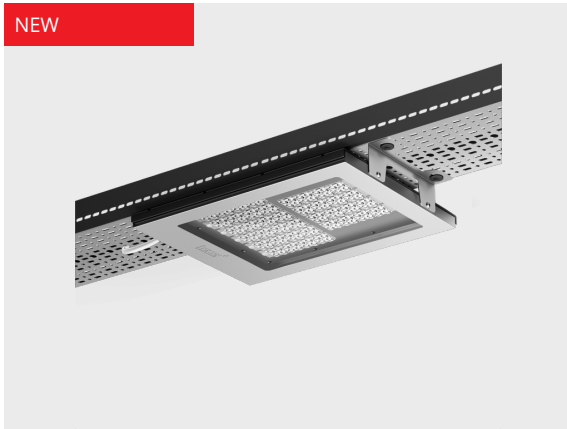

[T-ASYM-A]
Tunnel, Asymmetric,
Type A -



[T-ASYM-B]
Tunnel, Asymmetric,
Type B -



[T-CB-A]
Tunnel, Counter
beam, Type A -



[T-CB-D]
Tunnel, Counter
beam, Type D -



[T-CB-E]
Tunnel, Counter
beam, Type E -



[T-SYM-A]
Tunnel, Symmetric,
Type A -



[T-SYM-B]
Tunnel, Symmetric,
Type B -

Variants

Light distribution	[T-ASYM-A], [T-ASYM-B], [T-CB-A], [T-CB-D], [T-CB-E], [T-SYM-A], [T-SYM-B]
Delivered lumens flux	21544 - 49219 lm
Rated input power	173 - 340 W
Colour temperature	3000 K CRI 70, 4000 K CRI 70
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Product colours



Extras

Light output	Constant light output
Consult the factory	Class II, 120-277V 50/60Hz

Technical information

Mounting	Standard strap connection.
Housing	Corrosion resistant stainless steel housing (AISI 316 / EN 1.4401 grade) combined with aluminum alloy heatsink
Finishing	Polished stainless steel, anodized aluminum
Fasteners	Stainless steel (AISI 316 / EN 1.4401 grade)
Gasket	EPDM gasket (Shore A 25-30)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK10
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	13.40 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of halogen-free cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Mounting accessories



**Control gear box
M for NOX family**

007502102


Mounting accessories



**Control gear box L
for NOX family**

007502104

Mounting accessories




**Preassembled
cables and 5-pole
connector set for
NOX**

007502168

Project name		Type		Quantity	
Date		Note			

LT1010.769-EN-____-____-____-____**-EN-C1-**____-____-____

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T-ASYM-A] Tunnel, Asymmetric, Type A [T-ASYM-B] Tunnel, Asymmetric, Type B [T-CB-A] Tunnel, Counter beam, Type A [T-CB-D] Tunnel, Counter beam, Type D [T-CB-E] Tunnel, Counter beam, Type E [T-SYM-A] Tunnel, Symmetric, Type A [T-SYM-B] Tunnel, Symmetric, Type B	[350] 173 W [500] 242 W [700] 340 W	[730] 3000 K CRI 70 [740] 4000 K CRI 70		[SS]  Stainless steel
Extras	Accessories (<i>To be ordered separately</i>)			
Light output	Mounting accessories			
[CLO] Constant light output	[007502102] Control gear box M for NOX family			
Consult the factory	[007502104] Control gear box L for NOX family			
[C2] Class II	[007502168] Preassembled cables and 5-pole connector set for NOX			
[UNI] 120-277V 50/60Hz				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LT1010.769-EN-T-ASYM-A-350-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	21935 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-ASYM-A-350-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	23362 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-ASYM-A-500-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	32373 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-ASYM-A-500-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	34249 lm	242 W	4000 K CRI 70	
LT1010.769-EN-T-ASYM-A-700-730	[T-ASYM-A] Tunnel, Asymmetric, Type A	41751 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-ASYM-A-700-740	[T-ASYM-A] Tunnel, Asymmetric, Type A	44890 lm	340 W	4000 K CRI 70	
LT1010.769-EN-T-ASYM-B-350-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	22021 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-ASYM-B-350-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	23453 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-ASYM-B-500-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	32499 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-ASYM-B-500-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	34382 lm	242 W	4000 K CRI 70	
LT1010.769-EN-T-ASYM-B-700-730	[T-ASYM-B] Tunnel, Asymmetric, Type B	45065 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-ASYM-B-700-740	[T-ASYM-B] Tunnel, Asymmetric, Type B	41913 lm	340 W	4000 K CRI 70	
LT1010.769-EN-T-CB-A-350-730	[T-CB-A] Tunnel, Counter beam, Type A	23069 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-CB-A-350-740	[T-CB-A] Tunnel, Counter beam, Type A	24570 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-CB-A-500-730	[T-CB-A] Tunnel, Counter beam, Type A	34046 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-CB-A-500-740	[T-CB-A] Tunnel, Counter beam, Type A	36019 lm	242 W	4000 K CRI 70	
LT1010.769-EN-T-CB-A-700-730	[T-CB-A] Tunnel, Counter beam, Type A	43908 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-CB-A-700-740	[T-CB-A] Tunnel, Counter beam, Type A	47210 lm	340 W	4000 K CRI 70	
LT1010.769-EN-T-CB-D-350-730	[T-CB-D] Tunnel, Counter beam, Type D	21544 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-CB-D-350-740	[T-CB-D] Tunnel, Counter beam, Type D	23178 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-CB-D-500-730	[T-CB-D] Tunnel, Counter beam, Type D	31796 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-CB-D-500-740	[T-CB-D] Tunnel, Counter beam, Type D	33978 lm	242 W	4000 K CRI 70	
LT1010.769-EN-T-CB-D-700-730	[T-CB-D] Tunnel, Counter beam, Type D	45770 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-CB-D-700-740	[T-CB-D] Tunnel, Counter beam, Type D	49219 lm	340 W	4000 K CRI 70	
LT1010.769-EN-T-CB-E-350-730	[T-CB-E] Tunnel, Counter beam, Type E	22126 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-CB-E-350-740	[T-CB-E] Tunnel, Counter beam, Type E	23565 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-CB-E-500-730	[T-CB-E] Tunnel, Counter beam, Type E	32654 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-CB-E-500-740	[T-CB-E] Tunnel, Counter beam, Type E	34546 lm	242 W	4000 K CRI 70	
LT1010.769-EN-T-CB-E-700-730	[T-CB-E] Tunnel, Counter beam, Type E	42113 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-CB-E-700-740	[T-CB-E] Tunnel, Counter beam, Type E	45280 lm	340 W	4000 K CRI 70	
LT1010.769-EN-T-SYM-A-350-730	[T-SYM-A] Tunnel, Symmetric, Type A	21852 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-SYM-A-350-740	[T-SYM-A] Tunnel, Symmetric, Type A	23274 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-SYM-A-500-730	[T-SYM-A] Tunnel, Symmetric, Type A	32250 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-SYM-A-500-740	[T-SYM-A] Tunnel, Symmetric, Type A	34119 lm	242 W	4000 K CRI 70	
LT1010.769-EN-T-SYM-A-700-730	[T-SYM-A] Tunnel, Symmetric, Type A	41470 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-SYM-A-700-740	[T-SYM-A] Tunnel, Symmetric, Type A	44618 lm	340 W	4000 K CRI 70	
LT1010.769-EN-T-SYM-B-350-730	[T-SYM-B] Tunnel, Symmetric, Type B	21598 lm	173 W	3000 K CRI 70	
LT1010.769-EN-T-SYM-B-350-740	[T-SYM-B] Tunnel, Symmetric, Type B	23003 lm	173 W	4000 K CRI 70	
LT1010.769-EN-T-SYM-B-500-730	[T-SYM-B] Tunnel, Symmetric, Type B	31875 lm	242 W	3000 K CRI 70	
LT1010.769-EN-T-SYM-B-500-740	[T-SYM-B] Tunnel, Symmetric, Type B	33722 lm	242 W	4000 K CRI 70	

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 23.02.2024. For current version visit heperlighting.com. All flux ($\pm 7\%$ tolerance) and power values ($\pm 10\%$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

LT1010.769-EN-T-SYM-B-700-730	[T-SYM-B] Tunnel, Symmetric, Type B	41109 lm	340 W	3000 K CRI 70	
LT1010.769-EN-T-SYM-B-700-740	[T-SYM-B] Tunnel, Symmetric, Type B	44200 lm	340 W	4000 K CRI 70	