


PRIFMA W ML EVO 2 Module

LW2042.682-US

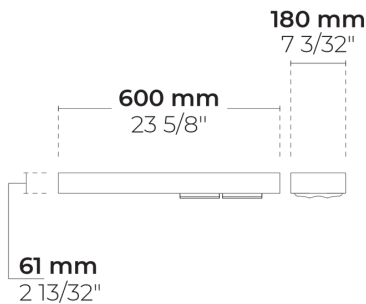

[T2]
Type II - 130x85°

Configurations

Light distribution	[T2] 130x85°
Delivered lumens flux	5819 - 7357 lm
Rated input power	70 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B2-U0-G1, B1-U0-G1
Lifetime L90 (hour)	>60, 000
Lifetime L80 (hour)	>60, 000

Options

Control	On/Off, 0-10V
Product colors	

Extras








Luminaire body options	Double powder coating
-------------------------------	-----------------------

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12.13 lb
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C

Project name		Type		Quantity	
Date		Note			

LW2042.682-US- _ _ _ _ _

Light distribution	Rated input power	Color temperature	Control	Product colors
[T2] Type II - 130x85°	[700] 70 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras				
Luminaire body options				
[DPC] Double powder coating				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LW2042.682-US-T2-700-740	[T2] Type II - 130x85°	6897 lm	70 W	4000 K CRI 70	On/Off, 0-10V
LW2042.682-US-T2-700-827	[T2] Type II - 130x85°	5819 lm	70 W	2700 K CRI 80	On/Off, 0-10V
LW2042.682-US-T2-700-830	[T2] Type II - 130x85°	7357 lm	70 W	4000 K CRI 80	On/Off, 0-10V
LW2042.682-US-T2-700-840	[T2] Type II - 130x85°	5891 lm	70 W	3000 K CRI 80	On/Off, 0-10V