


DOGO Side

LW6048.585-US

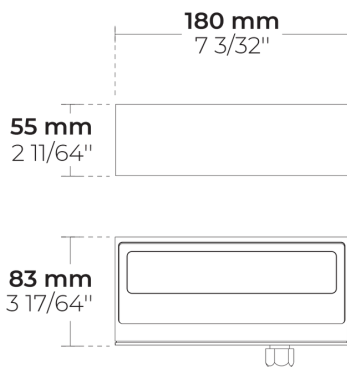

[SLSW]

Special linear, Side
throw - 154x55°

Configurations

Light distribution	[SLSW] 154x55°
Delivered lumens flux	402 - 1170 lm
Rated input power	5 - 10 W
Color temperature	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B1-U0-G1, B0-U0-G0
Lifetime L90 (hour)	>42, 000
Lifetime L80 (hour)	>42, 000

Options

Control	On/Off
Product colors	

Extras

Mounting options	Extra surface mounting adaptor for a flat wall
Luminaire body options	Double powder coating

Technical information

Mounting	Surface or wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	2.5 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord
Packing box dimensions	4 21/64" * 7 7/8" * 2 3/4"

Accessories (To be ordered separately)

Mounting accessories










**DALI driver within
an IP67 box for
DOGO**

007502840

Project name				Type		Quantity	
Date		Note					

LW6048.585-US-____-____-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLSW] Special linear, Side throw - 154x55°	[350] 5 W [700] 10 W	[822] 2200 K CRI 80 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Mounting options	Mounting accessories			
[ESMA] Extra surface mounting adaptor for a flat wall	[007502840] DALI driver within an IP67 box for DOGO			
Luminaire body options				
[DPC] Double powder coating				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LW6048.585-US-SLSW-350-740	[SLSW] Special linear, Side throw - 154x55°	585 lm	5 W	4000 K CRI 70	On/Off
LW6048.585-US-SLSW-350-822	[SLSW] Special linear, Side throw - 154x55°	402 lm	5 W	2200 K CRI 80	On/Off
LW6048.585-US-SLSW-350-827	[SLSW] Special linear, Side throw - 154x55°	499 lm	5 W	2700 K CRI 80	On/Off
LW6048.585-US-SLSW-350-830	[SLSW] Special linear, Side throw - 154x55°	496 lm	5 W	3000 K CRI 80	On/Off
LW6048.585-US-SLSW-350-840	[SLSW] Special linear, Side throw - 154x55°	554 lm	5 W	4000 K CRI 80	On/Off
LW6048.585-US-SLSW-700-740	[SLSW] Special linear, Side throw - 154x55°	1170 lm	10 W	4000 K CRI 70	On/Off
LW6048.585-US-SLSW-700-822	[SLSW] Special linear, Side throw - 154x55°	803 lm	10 W	2200 K CRI 80	On/Off
LW6048.585-US-SLSW-700-827	[SLSW] Special linear, Side throw - 154x55°	998 lm	10 W	2700 K CRI 80	On/Off
LW6048.585-US-SLSW-700-830	[SLSW] Special linear, Side throw - 154x55°	1030 lm	10 W	3000 K CRI 80	On/Off
LW6048.585-US-SLSW-700-840	[SLSW] Special linear, Side throw - 154x55°	1108 lm	10 W	4000 K CRI 80	On/Off