



# DOGO 8 LED

LW6048.910-US

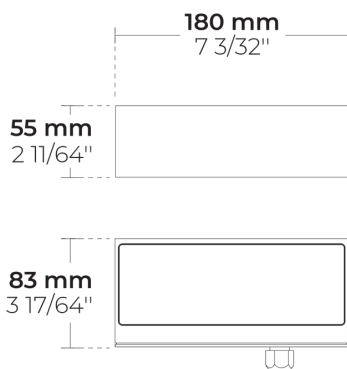

NEW



[T3]

Type III - 144x57°

## Configurations

Light distribution	[T3] 144x57°
Delivered lumens flux	709 - 808 lm
Rated input power	9.5 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

Control	On/Off, 0-10V
Product colors	

## Extras

Mounting options	Extra surface mounting adaptor for a flat wall
Luminaire body options	Double powder coating

## Technical information

Mounting	Surface or wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	2.5 lbs
Driver	Internal LED driver
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord
Packing box dimensions	4 21/64" * 7 7/8" * 2 3/4"

Project name				Type		Quantity	
Date		Note					

**LW6048.910-US-**\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_-\_\_\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T3]</b> Type III - 144x57°	<b>[350]</b> 9.5 W	<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[0-10V]</b> 0-10V	<div> <b>[HM1]</b> <div></div>           Black         </div> <div> <b>[HM2]</b> <div></div>           Dark gray         </div> <div> <b>[HM3]</b> <div></div>           Anthracite gray         </div> <div> <b>[HM4]</b> <div></div>           Light gray         </div> <div> <b>[HM5]</b> <div></div>           White         </div> <div> <b>[CC]</b> <div></div>           Custom color (Please specify RAL code)         </div>

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LW6048.910-US-T3-350-740	[T3] Type III - 144x57°	808 lm	9.5 W	4000 K CRI 70	On/Off, 0-10V
LW6048.910-US-T3-350-827	[T3] Type III - 144x57°	709 lm	9.5 W	2700 K CRI 80	On/Off, 0-10V
LW6048.910-US-T3-350-830	[T3] Type III - 144x57°	709 lm	9.5 W	3000 K CRI 80	On/Off, 0-10V
LW6048.910-US-T3-350-840	[T3] Type III - 144x57°	709 lm	9.5 W	4000 K CRI 80	On/Off, 0-10V