


DOGO 8 LED

LW6048.910-US

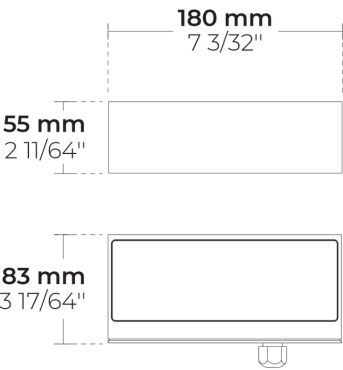

[T3]

Type III - 144x57°

Configurations

Light distribution	[T3] 144x57°
Delivered lumens flux	709 - 808 lm
Rated input power	9.5 W
Color temperature	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

Options

Control	On/Off, 0-10V
Product colors	

Extras







Mounting options	Extra surface mounting adaptor for a flat wall
Luminaire body options	Double powder coating

Technical information

Mounting	Surface or wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	2.5 lbs
Driver	Internal LED driver
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	8" of flexible power cord
Packing box dimensions	4 21/64" * 7 7/8" * 2 3/4"

Project name				Type		Quantity	
Date		Note					

LW6048.910-US-____-____-____-____-____-____-____-____

Light distribution	Rated input power	Color temperature	Control	Product colors
[T3] Type III - 144x57°	[350] 9.5 W	[827] 2700 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[ONOFF] On/Off [0-10V] 0-10V	[HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [CC]  Custom color (Please specify RAL code)
Extras				
Mounting options				
[ESMA] Extra surface mounting adaptor for a flat wall				
Luminaire body options [DPC] Double powder coating				

Configuration code	Light distribution	Delivered lumens flux	Rated input power	Color temperature	Control
LW6048.910-US-T3-350-740	[T3] Type III - 144x57°	808 lm	9.5 W	4000 K CRI 70	On/Off, 0-10V
LW6048.910-US-T3-350-827	[T3] Type III - 144x57°	709 lm	9.5 W	2700 K CRI 80	On/Off, 0-10V
LW6048.910-US-T3-350-830	[T3] Type III - 144x57°	709 lm	9.5 W	3000 K CRI 80	On/Off, 0-10V
LW6048.910-US-T3-350-840	[T3] Type III - 144x57°	709 lm	9.5 W	4000 K CRI 80	On/Off, 0-10V