


DOGO Ex Side


LW7035.585-EN

CE UK CA IK08 IP65 



NEW

QUICK-SHIP

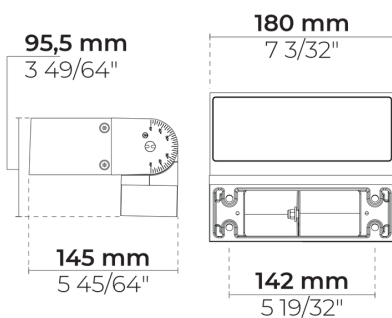

[SLSW]

Special linear, Side
throw - 154x55°

Variants

Light distribution	[SLSW] 154x55°
Delivered lumens flux	496 - 1170 lm
Rated input power	5 - 10 W
Colour temperature	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80
BUG rating	B0-U0-G0, B1-U0-G1
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

Options

Control

On/Off, DALI

Product colours



Extras

Consult the factory	Emergency kit, Motion sensor
Luminaire body options	Double powder coating

Technical information

Mounting	Surface or wall mountable with angle setting mechanism
Tilt angle	+135°/0°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	N/A
Weight	5.1 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 01.04.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)








Mounting accessories



**DALI driver within
an IP67 box for
DOGO**

007502840

Project name		Type		Quantity	
Date		Note			
LW7035.585-EN-__-__-__-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLSW] Special linear, Side throw - 154x55°	[350] 5 W	[822] 2200 K CRI 80	[ONOFF] On/Off	[HM1]  Black
	[700] 10 W	[827] 2700 K CRI 80	[DALI] DALI	[HM2]  Dark grey
		[830] 3000 K CRI 80		[HM3]  Anthracite grey
		[740] 4000 K CRI 70		[HM4]  Light grey
		[840] 4000 K CRI 80		[HM5]  White
				[HM6]  Bronze
				[CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[EK] Emergency kit	[007502840] DALI driver within an IP67 box for DOGO			
[MS] Motion sensor				
Luminaire body options				
[DPC] Double powder coating				

Variant code	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control
LW7035.585-EN-SLSW-350-740	[SLSW] Special linear, Side throw - 154x55°	585 lm	5 W	4000 K CRI 70	On/Off
LW7035.585-EN-SLSW-350-822	[SLSW] Special linear, Side throw - 154x55°	585 lm	5 W	4000 K CRI 70	On/Off
LW7035.585-EN-SLSW-350-827	[SLSW] Special linear, Side throw - 154x55°	499 lm	5 W	2700 K CRI 80	On/Off
LW7035.585-EN-SLSW-350-830	[SLSW] Special linear, Side throw - 154x55°	496 lm	5 W	3000 K CRI 80	On/Off
LW7035.585-EN-SLSW-350-840	[SLSW] Special linear, Side throw - 154x55°	554 lm	5 W	4000 K CRI 80	On/Off
LW7035.585-EN-SLSW-700-740	[SLSW] Special linear, Side throw - 154x55°	1170 lm	10 W	4000 K CRI 70	On/Off
LW7035.585-EN-SLSW-700-822	[SLSW] Special linear, Side throw - 154x55°	803 lm	10 W	2200 K CRI 80	On/Off
LW7035.585-EN-SLSW-700-827	[SLSW] Special linear, Side throw - 154x55°	998 lm	10 W	2700 K CRI 80	On/Off
LW7035.585-EN-SLSW-700-830	[SLSW] Special linear, Side throw - 154x55°	1030 lm	10 W	3000 K CRI 80	On/Off
LW7035.585-EN-SLSW-700-840	[SLSW] Special linear, Side throw - 154x55°	1108 lm	10 W	4000 K CRI 80	On/Off