

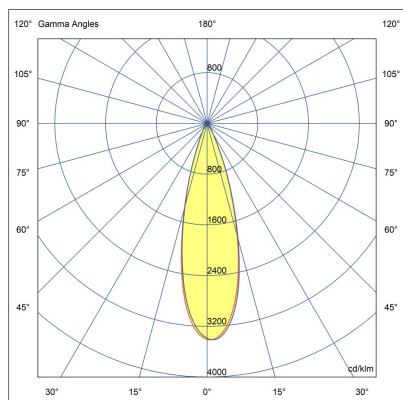


VEGA C

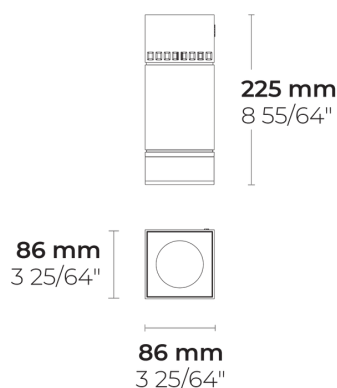

LD8020.693-EN-N-700-740

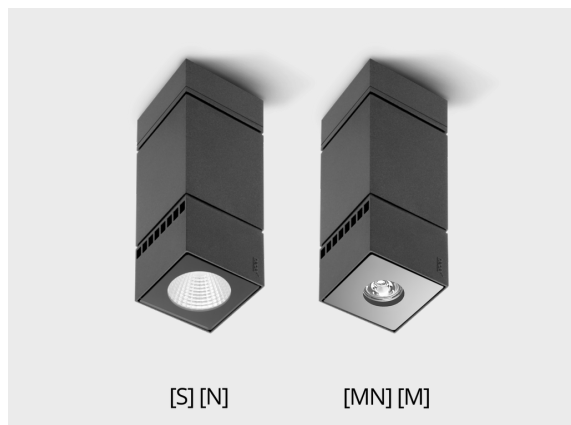

[N]

Narrow - NEMA Type 2

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [N] 26° |
| Delivered lumens flux | 1019 lm |
| Rated input power | 10 W |
| Color temperature | 4000 K CRI 70 |
| Luminaire efficacy | 101 lm/W |
| Lamp | 1 LED |
| Color Deviation | 5 SDCM |
| BUG rating | B1-U0-G0 |
| Lifetime L90 (hour) | >72,600 |
| Lifetime L80 (hour) | >72,600 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Ceiling mountable |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Liquid silicone |
| Lens / Reflector | High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M] |
| Glass / Diffuser | Tempered safety glass |
| Impact protection | IK07 |
| Ingress protection | IP65 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 5.4 kg |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 10/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -25...50°C |
| Power cord | 8" of flexible power cord |

Accessories (To be ordered separately)

Optical accessories










Visor for VEGA S

100708016

| | | | | | | | |
|--------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |

LD8020.693-EN-N-700-740-__-__-__-__

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|--|--|---|--|
| [N] Narrow - NEMA Type 2 - 26° [S] Spot - NEMA Type 0 - 7° [MN] Medium narrow - NEMA Type 3 - 42° [M] Medium - NEMA Type 4 - 60° | [700] 10 W | [740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80 | [ONOFF] On/Off [DALI] DALI | [HM1]  Black [HM2]  Dark gray [HM3]  Anthracite gray [HM4]  Light gray [HM5]  White [HM6]  Bronze [CC]  Custom color (Please specify RAL code) |
| Extras | Accessories (<i>To be ordered separately</i>) | | | |
| Consult the factory | Optical accessories | | | |
| [UNI] 120-277V 50/60Hz | [100708016] Visor for VEGA S | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |