


LB6011.513-EN-SYM-4L-700-740-ONOFF

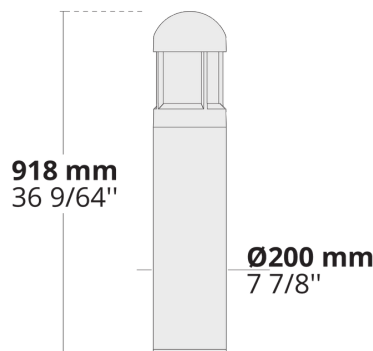

[SYM-4L]

Symmetric, Special effect: 4 lines

Configuration

Light distribution	[SYM-4L] 360°
Delivered lumens flux	1551 lm
Rated input power	20 W
Color temperature	4000 K CRI 70
Luminaire efficacy	78 lm/W
Lamp	8 LED
Color Deviation	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000


Options

Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	EPDM gasket (Shore A 50)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	10 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts



623J014

623J014

Project name					Type		Quantity	
Date			Note					
LB6011.513-EN-SYM-4L-700-740-ONOFF-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors	
[SYM-4L] Symmetric, Special effect: 4 lines - 360°	[700] 20 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black	
		[830] 3000 K CRI 80		[HM2] Dark gray	
				[HM3] Anthracite gray	
				[HM4] Light gray	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom color (Please specify RAL code)	
Extras	Accessories (<i>To be ordered separately</i>)				
Consult the factory	Anchor bolts				
[UNI] 120-277V 50/60Hz	[623J014] 623J014				
Luminaire body options					
[DPC] Double powder coating					