

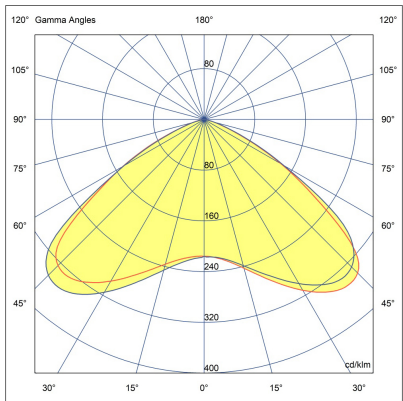


# C-LIGHT AFX 4 Module

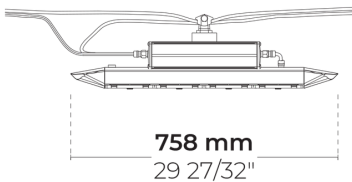

LC2029.864-US-T5-350-740

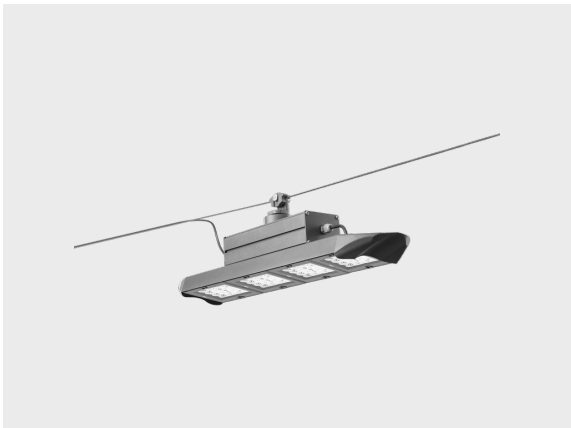

[T5]  
Type V

HEPER USA LLC  
W227 N546 Westmound Drive Waukesha, 53186  
Wisconsin, United States  
+1 312 910 9740  
infoUS@hepergroup.com

## Configuration

Light distribution	[T5] 117°
Delivered lumens flux	9375 lm
Rated input power	68 W
Color temperature	4000 K CRI 70
Luminaire efficacy	138 lm/W
Lamp	64 LED
Color Deviation	4 SDCM
BUG rating	B3-U0-G1
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000




## Options

## Technical information

Mounting	Catenary wire mounting
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	19.36 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Packing box dimensions	31 1/2" * 7 7/8" * 9 27/32"

We reserve the right to change specifications without prior written notice. Edition: 09.05.2024. For current version visit [heperlighting.com](http://heperlighting.com). All flux ( $\pm 7\%$  tolerance) and power values ( $\pm 10\%$  tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name				Type		Quantity	
Date		Note					
LC2029.864-US-T5-350-740-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T5]</b> Type V - 117°	<b>[350]</b> 68 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM3]</b>  Anthracite gray
	<b>[500]</b> 97 W	<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM4]</b>  Light gray
	<b>[700]</b> 135 W	<b>[830]</b> 3000 K CRI 80		<b>[CC]</b>  Custom color (Please specify RAL code)
<b>[840]</b> 4000 K CRI 80				
<b>Extras</b>				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				