


# WINGS AFX 4 Module



LL2012.864-US-T3-350-740-ONOFF

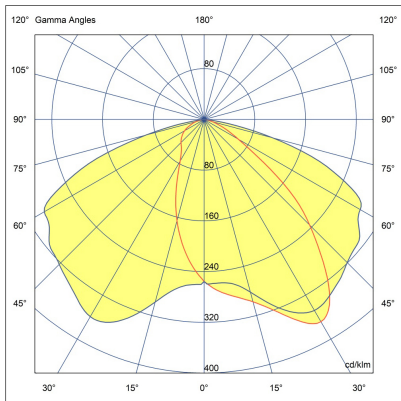

[T3]  
Type III

## Configuration

Light distribution	[T3] 143x63°
Delivered lumens flux	8625 lm
Rated input power	68 W
Color temperature	4000 K CRI 70
Luminaire efficacy	127 lm/W
Lamp	64 LED
Color Deviation	4 SDCM
BUG rating	B2-U1-G1
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	140.88 lbs (16.5'), 157.67 lbs (20')
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord
Packing box dimensions	17 23/32"*3 5/32"*22 53/64"
Pole detail	Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional

# Poles (Included)

---

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFD.R01.T002-H5	16.4'	7.3x4.7"	
PAFD.R01.T002-H6	19.7'	7.3x4.7"	

Project name				Type		Quantity	
Date		Note					

LL2012.864-US-T3-350-740-ONOFF-\_\_-\_\_-\_\_

Light distribution	Rated input power	Color temperature	Control	Product colors
<div>[T3] Type III - 143x63°</div> <div>[P4] Pedestrian crosswalk distribution - 20x78°</div> <div>[T1] Type I - 111x48°</div> <div>[T2] Type II - 133x48°</div> <div>[T2] Type II - 149x54°</div> <div>[T4] Type IV - 117x64°</div> <div>[T5] Type V - 117°</div>	<div>[350] 68 W</div> <div>[700] 135 W</div> <div>[500] 97 W</div>	<div>[740] 4000 K CRI 70</div> <div>[827] 2700 K CRI 80</div> <div>[830] 3000 K CRI 80</div> <div>[840] 4000 K CRI 80</div>	<div>[ONOFF] On/Off</div>	<div>[HM1] Black</div> <div>[HM2] Dark gray</div> <div>[HM3] Anthracite gray</div> <div>[HM4] Light gray</div> <div>[HM5] White</div> <div>[HM6] Bronze</div> <div>[CC] Custom color (Please specify RAL code)</div>
Height	Extras			
<div>[H5] 16.4'</div> <div>[H6] 19.7'</div> <div>[HC]</div>	<div>Luminaire body options</div> <div>[DPC] Double powder coating</div>			