


# TILA S AFX 1 Module

CE UK CA IK08 IP66



LL2030.861-EN-T3-350-827-ONOFF-EN-C1

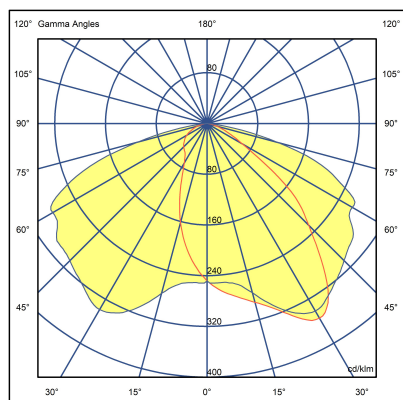

# Poles (Included)

## Product specific poles with flange plate



| Variant code              | Height | Diameter /<br>Dimensions | Spigot<br>diameter |
|---------------------------|--------|--------------------------|--------------------|
| PAFD.R02.T001.T00<br>2-H3 | 3m     | 120*80mm                 |                    |
| PAFD.R02.T001.T00<br>2-H4 | 4m     | 120*80mm                 |                    |

|                                                      |  |             |  |                 |  |
|------------------------------------------------------|--|-------------|--|-----------------|--|
| <b>Project name</b>                                  |  | <b>Type</b> |  | <b>Quantity</b> |  |
| <b>Date</b>                                          |  | <b>Note</b> |  |                 |  |
| <b>LL2030.861-EN-T3-350-827-ONOFF-EN-C1-_-_-_-_-</b> |  |             |  |                 |  |

| Light distribution                                                                    | Rated input power                        | Colour temperature            | Control                  | Product colours                                                                                                                               |
|---------------------------------------------------------------------------------------|------------------------------------------|-------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[T3]</b><br>Type III, Asymmetric,<br>Side throw - 143x63°                          | <b>[350]</b><br>18 W                     | <b>[827]</b><br>2700 K CRI 80 | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b> <br>Black                                     |
| <b>[P4]</b><br>Special pedestrian<br>road distribution-right<br>side traffic - 20x78° | <b>[500]</b><br>25 W                     | <b>[830]</b><br>3000 K CRI 80 |                          | <b>[HM2]</b> <br>Dark grey                                 |
| <b>[T1]</b><br>Type I, Asymmetric,<br>Side throw - 111x48°                            | <b>[700]</b><br>35 W                     | <b>[740]</b><br>4000 K CRI 70 |                          | <b>[HM3]</b> <br>Anthracite grey                           |
| <b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 133x48°                           |                                          | <b>[840]</b><br>4000 K CRI 80 |                          | <b>[HM4]</b> <br>Light grey                                |
| <b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 149x54°                           |                                          |                               |                          | <b>[HM5]</b> <br>White                                     |
| <b>[T4]</b><br>Type IV, Asymmetric,<br>Forward throw -<br>117x64°                     |                                          |                               |                          | <b>[HM6]</b> <br>Bronze                                    |
| <b>[T5]</b><br>Type V, Symmetric -<br>117°                                            |                                          |                               |                          | <b>[CC]</b> <br>Custom colour (Please<br>specify RAL code) |
| <b>Height</b>                                                                         | <b>Extras</b>                            |                               |                          |                                                                                                                                               |
| <b>[H3]</b><br>3m                                                                     | <b>Consult the factory</b>               |                               |                          |                                                                                                                                               |
| <b>[H4]</b><br>4m                                                                     | <b>[UNI]</b><br>120-277V 50/60Hz         |                               |                          |                                                                                                                                               |
| <b>[HC]</b>                                                                           | <b>Luminaire body<br/>options</b>        |                               |                          |                                                                                                                                               |
|                                                                                       | <b>[DPC]</b><br>Double powder<br>coating |                               |                          |                                                                                                                                               |