
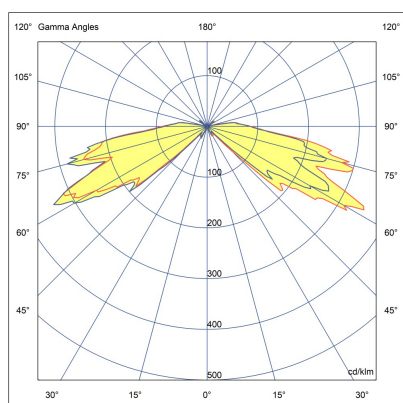
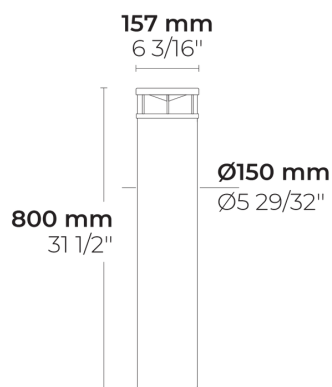


LB6009.693-US-SYM-3L-700-740

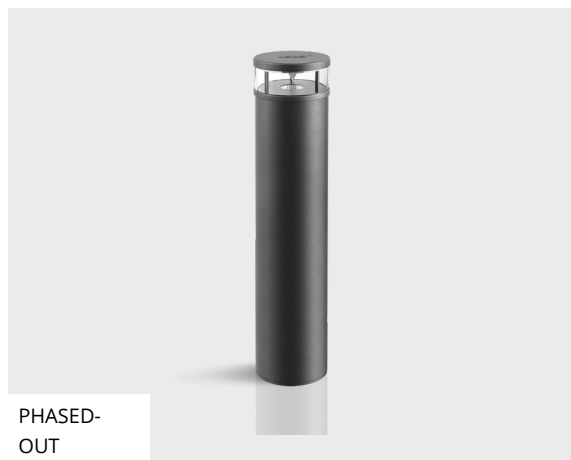

[SYM-3L]

Symmetric, Special  
effect: 3 lines

## Configuration

Light distribution	[SYM-3L] 165°
Delivered lumens flux	541 lm
Rated input power	10 W
Color temperature	4000 K CRI 70
Luminaire efficacy	54 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
BUG rating	B1-U2-G1
ULOR	3.6
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options


## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	9.7 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	4/2 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

## Accessories (To be ordered separately)

---








### Anchor bolts



612J014

612J014

Project name					Type		Quantity	
Date		Note						
LB6009.693-US-SYM-3L-700-740-__-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM-3L] Symmetric, Special effect: 3 lines - 165°	[700] 10 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black 
		[827] 2700 K CRI 80  [830] 3000 K CRI 80  [840] 4000 K CRI 80	[0-10V] 0-10V	[HM2] Dark gray   [HM3] Anthracite gray   [HM4] Light gray   [HM5] White   [HM6] Bronze   [CC]  Custom color (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H0.80] 2.6'  [HC]	Luminaire body options	Anchor bolts		
	[DPC] Double powder coating	[612J014] 612J014		