


# VESTA L 4 LED



LB6020.500-US-SLFB-350-830-ONOFF



PHASED-  
OUT

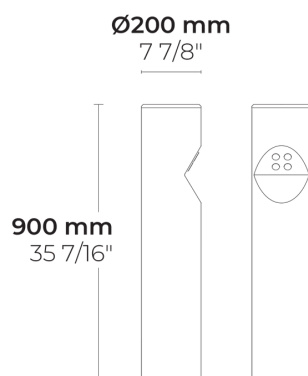

[SLFB]

Special linear,  
Forward throw

## Configuration

Light distribution	[SLFB] 85x90°
Delivered lumens flux	370 lm
Rated input power	6 W
Color temperature	3000 K CRI 80
Luminaire efficacy	62 lm/W
Lamp	4 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000


## Options

## Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	18.8 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)

## Anchor bolts



623J014

623J014

Project name				Type		Quantity	
Date		Note					

**LB6020.500-US-SLFB-350-830-ONOFF-\_\_-\_\_**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SLFB]</b> Special linear, Forward throw - 85x90°	<b>[350]</b> 6 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
		<b>[740]</b> 4000 K CRI 70		<b>[HM2]</b> Dark gray
				<b>[HM3]</b> Anthracite gray
				<b>[HM4]</b> Light gray
				<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Luminaire body options	Anchor bolts			
	<b>[623J014]</b> 623J014			
<b>[DPC]</b> Double powder coating				