
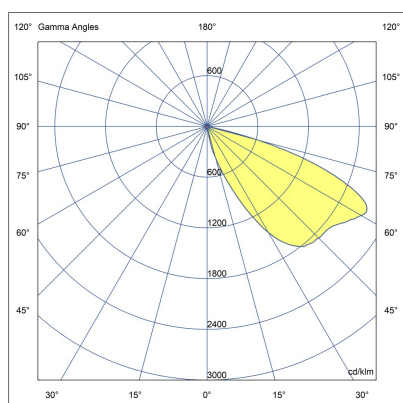


LB6020.546-EN-SLFB-350-830-ONOFF

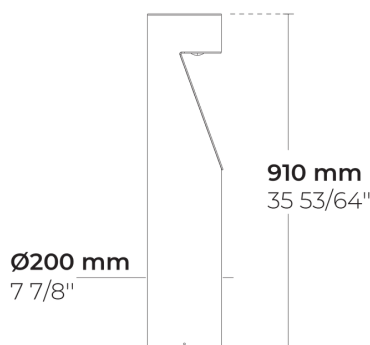

[SLFB]
Special linear,
Forward throw

Configuration

Light distribution	[SLFB] 120x47°
Delivered lumens flux	138 lm
Rated input power	4 W
Color temperature	3000 K CRI 80
Luminaire efficacy	34 lm/W
Lamp	2 LED
Color Deviation	3 SDCM
BUG rating	B0-U0-G0
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	8.6 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.60
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)








Anchor bolts



623J014

623J014

Project name				Type		Quantity	
Date		Note					
LB6020.546-EN-SLFB-350-830-ONOFF-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors	
[SLFB] Special linear, Forward throw - 120x47°	[350] 4 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
		[827] 2700 K CRI 80		[HM2] Dark gray	
		[740] 4000 K CRI 70		[HM3] Anthracite gray	
		[840] 4000 K CRI 80		[HM4] Light gray	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom color (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)			
[H0.90] 2.9'	Consult the factory	Anchor bolts			
	[UNI] 120-277V 50/60Hz	[623J014] 623J014			
	Luminaire body options				
	[DPC] Double powder coating				