





LB6020.546-US-SLFB-350-740-ONOFF-UNI-C1

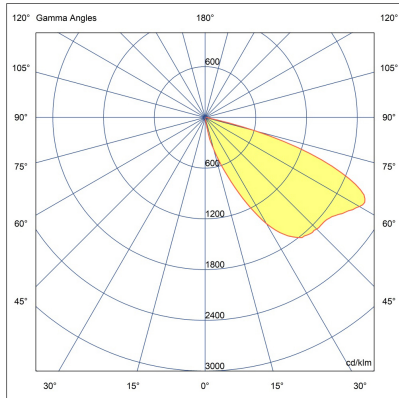

PHASED-  
OUT

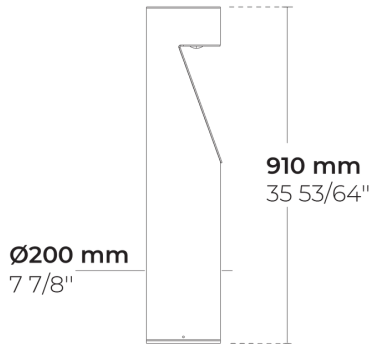

[SLFB]

Special linear,  
Forward throw

Variant

Light distribution	[SLFB] 120x47°
Delivered lumens flux	159 lm
Rated input power	4 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	39 lm/W
Lamp	2 LED
MacAdam Ellipse	4 SDCM
BUG rating	B0-U0-G0
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options


Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffuser	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	18.7 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	3/3 kV
Power factor	> 0.40
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

## Accessories (To be ordered separately)

---








### Anchorage



623J014

623J014

Project name		Type		Quantity	
Date		Note			
LB6020.546-US-SLFB-350-740-ONOFF-UNI-C1-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 120x47°	[350] 4 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black 
		[827] 2700 K CRI 80		[HM2] Dark grey 
		[830] 3000 K CRI 80		[HM3] Anthracite grey 
		[840] 4000 K CRI 80		[HM4] Light grey 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom colour (Please specify RAL code)
Accessories ( <i>To be ordered separately</i> )				
Anchorage				
[623J014] 623J014				