
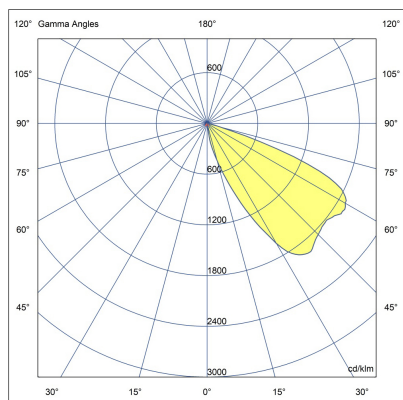


LB6042.545-EN-SLFB-350-830-ONOFF-EN-C1

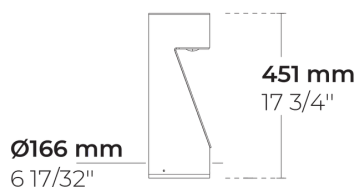

[SLFB]

Special linear,
Forward throw

Variant

Light distribution	[SLFB] 120x47°
Delivered lumens flux	69 lm
Rated input power	3 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	23 lm/W
Lamp	1 LED
MacAdam Ellipse	3 SDCM
BUG rating	B0-U0-G0
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.5 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.60
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage



629J014

629J014

Project name		Type		Quantity	
Date		Note			
LB6042.545-EN-SLFB-350-830-ONOFF-EN-C1-_-_-_-_-					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SLFB] Special linear, Forward throw - 120x47°	[350] 3 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
		[827] 2700 K CRI 80		[HM2] Dark grey	
		[740] 4000 K CRI 70		[HM3] Anthracite grey	
		[840] 4000 K CRI 80		[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)			
[H0.45] 45cm [HC]	Consult the factory	Anchorages			
	[UNI] 120-277V 50/60Hz	[629J014] 629J014			
	Luminaire body options				
	[DPC] Double powder coating				