

VESTA S L 4 LED

CE UK CA IK05 IP65




LB6044.500-EN-SLFB-350-740-ONOFF-EN-C1



PHASED-
OUT

Ø165 mm
6 1/2"

900 mm
35 7/16"

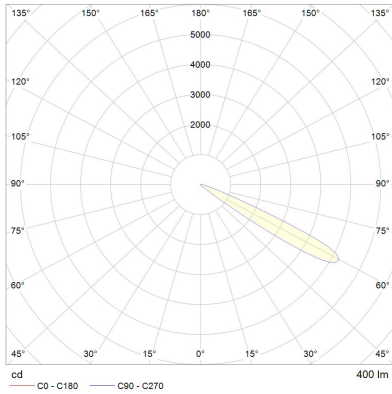

[SLFB]

Special linear,
Forward throw

Variant

Light distribution	[SLFB] 85x90°
Delivered lumens flux	400 lm
Rated input power	6 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	67 lm/W
Lamp	4 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>145,000
Lifetime L80B50 (hour)	>145,000

Options

Technical information

Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.49 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.60
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)








Anchorage



629J014

629J014

Project name		Type		Quantity	
Date		Note			
LB6044.500-EN-SLFB-350-740-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SLFB] Special linear, Forward throw - 85x90°	[350] 6 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black	
		[830] 3000 K CRI 80		[HM2] Dark grey	
				[HM3] Anthracite grey	
				[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Extras	Accessories (<i>To be ordered separately</i>)				
Consult the factory	Anchorage				
[UNI] 120-277V 50/60Hz	[629J014] 629J014				
Luminaire body options					
[DPC] Double powder coating					