


# VESTA S L 4 LED



LB6044.500-EN-SLFB-350-830-ONOFF



PHASED-  
OUT

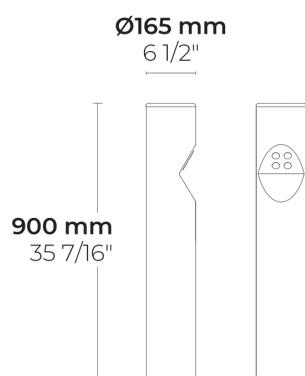

[SLFB]

Special linear,  
Forward throw

## Configuration

<b>Light distribution</b>	[SLFB] 85x90°
<b>Delivered lumens flux</b>	370 lm
<b>Rated input power</b>	6 W
<b>Color temperature</b>	3000 K CRI 80
<b>Luminaire efficacy</b>	62 lm/W
<b>Lamp</b>	4 LED
<b>Color Deviation</b>	3 SDCM
<b>Lifetime L90 (hour)</b>	>145,000
<b>Lifetime L80 (hour)</b>	>145,000


## Options

## Technical information

<b>Housing</b>	Corrosion resistant, extruded, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK05
<b>Ingress protection</b>	IP65
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	5.49 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	1/1 kV
<b>Power factor</b>	> 0.60
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	20" of outdoor use rated flexible power cord








# Accessories (To be ordered separately)

## Anchor bolts



629J014  
629J014

Project name				Type		Quantity	
Date		Note					
LB6044.500-EN-SLFB-350-830-ONOFF-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[SLFB] Special linear, Forward throw - 85x90°	[350] 6 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black 
		[740] 4000 K CRI 70		[HM2] Dark gray 
				[HM3] Anthracite gray 
				[HM4] Light gray 
				[HM5] White 
				[HM6] Bronze 
				[CC]  Custom color (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Anchor bolts			
[UNI] 120-277V 50/60Hz	[629J014] 629J014			
Luminaire body options				
[DPC] Double powder coating				