


TILA S AFX 3 Module



LL2030.863-EN-T5-350-830-ONOFF

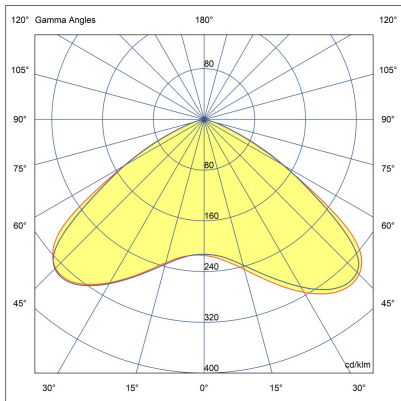

Poles (Included)

Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFD.R02.T001.T00 2-H5	16.4'	4.7x3.1"	
PAFD.R02.T001.T00 2-H6	19.7'	4.7x3.1"	

Project name				Type		Quantity	
Date		Note					

LL2030.863-EN-T5-350-830-ONOFF-__-__-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[T5] Type V - 117°	[350] 50 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[P4] Pedestrian crosswalk distribution - 20x78°	[500] 72 W	[827] 2700 K CRI 80		[HM2] Dark gray
[T1] Type I - 111x48°	[700] 100 W	[740] 4000 K CRI 70		[HM3] Anthracite gray
[T2] Type II - 133x48°		[840] 4000 K CRI 80		[HM4] Light gray
[T2] Type II - 149x54°				[HM5] White
[T3] Type III - 143x63°				[HM6] Bronze
[T4] Type IV - 117x64°				[CC] Custom color (Please specify RAL code)
Height	Extras			
[H5] 16.4'	Consult the factory			
[H6] 19.7'	[UNI] 120-277V 50/60Hz			
[HC]	Luminaire body options			
	[DPC] Double powder coating			