



# DOMINI 12 LED

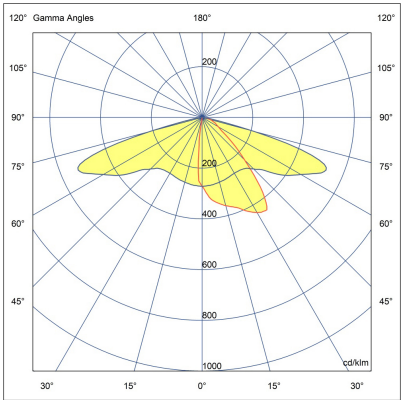

LB6047.551-US-T2-350-740-ONOFF

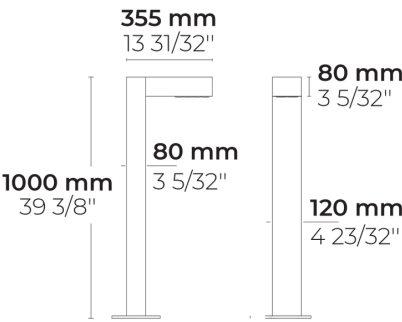

[T2]  
Type II

## Configuration

Light distribution	[T2] 140x50°
Delivered lumens flux	1626 lm
Rated input power	15 W
Color temperature	4000 K CRI 70
Luminaire efficacy	124 lm/W
Lamp	12 LED
Color Deviation	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000


## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	12.7 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	20" of outdoor use rated flexible power cord

# Accessories (To be ordered separately)








## Anchor bolts



90AJ001

90AJ001

Project name					Type		Quantity	
Date			Note					
LB6047.551-US-T2-350-740-ONOFF-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T2]</b> Type II - 140x50°	<b>[350]</b> 15 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
		<b>[830]</b> 3000 K CRI 80		<b>[HM2]</b>  Dark gray
				<b>[HM3]</b>  Anthracite gray
				<b>[HM4]</b>  Light gray
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Luminaire body options</b>	<b>Anchor bolts</b>			
	<b>[90AJ001]</b> 90AJ001			
<b>[DPC]</b> Double powder coating				