



PRIFMA AFX 3 Module



IK08 IP66



LL2042.863-EN-T5-350-740-EN-C1

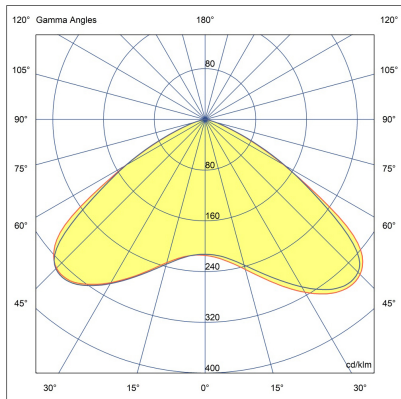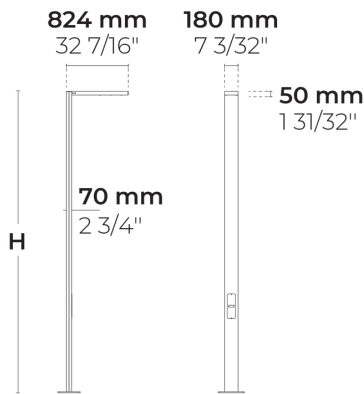

Poles (Included)

Product specific poles with flange plate



Variant code	Height	Diameter / Dimensions	Spigot diameter
PAFD.R03.T001-H5	5m	180*70mm	
PAFD.R03.T001-H6	6m	180*70mm	

Project name		Type		Quantity	
Date		Note			
LL2042.863-EN-T5-350-740-__-EN-C1-__-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T5] Type V, Symmetric - 117° [P4] Special pedestrian road distribution-right side traffic - 20x78° [T1] Type I, Asymmetric, Side throw - 111x48° [T2] Type II, Asymmetric, Side throw - 133x48° [T2] Type II, Asymmetric, Side throw - 149x54° [T3] Type III, Asymmetric, Side throw - 143x63° [T4] Type IV, Asymmetric, Forward throw - 117x64°	[350] 50 W [500] 72 W [700] 100 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code) [WD]  Wooden
Height	Extras			
[H5] 5m [H6] 6m [HC]	Light output			
	[BS] Backlight Shield			
	[CLO] Constant light output			
	Consult the factory			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			