

DOMINI 24 LED



CE UK CA IK05 IP65



LB6047.552-EN-T2-350-830-ONOFF-EN-C1



PHASED-
OUT

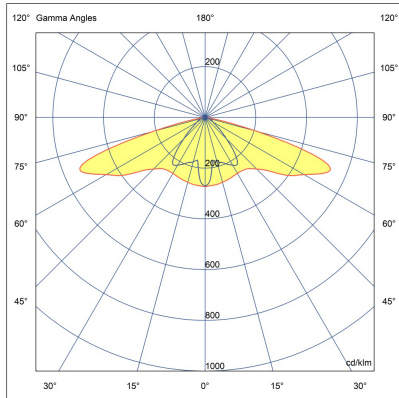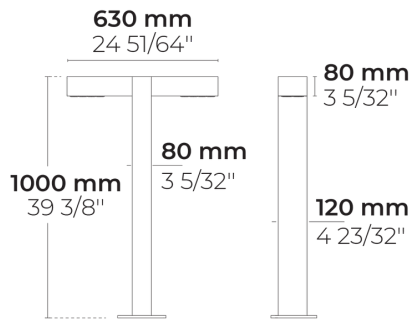

[T2]

Type II, Asymmetric,
Side throw

Variant

Light distribution	[T2] 140x100°
Delivered lumens flux	3229 lm
Rated input power	28 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	115 lm/W
Lamp	24 LED
MacAdam Ellipse	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90B50 (hour)	>145,000
Lifetime L80B50 (hour)	>145,000

Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.63 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-30...50°C
Cable	0.5 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)








Anchorage



90AJ001

90AJ001

Project name		Type		Quantity	
Date		Note			
LB6047.552-EN-T2-350-830-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[T2] Type II, Asymmetric, Side throw - 140x100°	[350] 28 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
		[740] 4000 K CRI 70		[HM2] Dark grey	
				[HM3] Anthracite grey	
				[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Extras	Accessories (<i>To be ordered separately</i>)				
Consult the factory	Anchorage				
[UNI] 120-277V 50/60Hz	[90AJ001] 90AJ001				
Luminaire body options					
[DPC] Double powder coating					