



DOMINI 24 LED



LB6047.552-US-T2-350-830-ONOFF



PHASED-
OUT

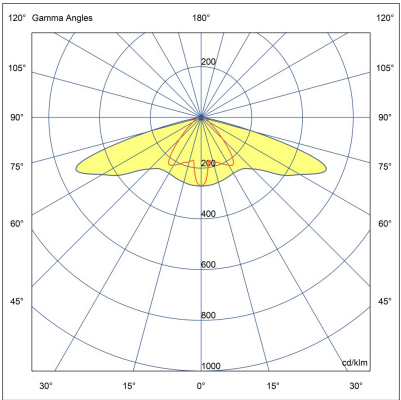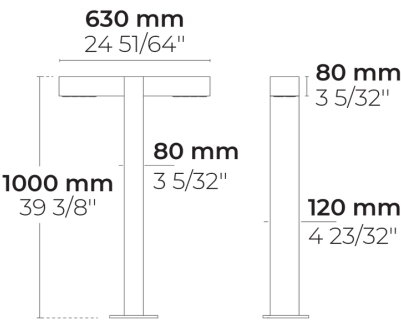

[T2]
Type II

Configuration

Light distribution	[T2] 140x100°
Delivered lumens flux	3229 lm
Rated input power	28 W
Color temperature	3000 K CRI 80
Luminaire efficacy	115 lm/W
Lamp	24 LED
Color Deviation	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90 (hour)	>145,000
Lifetime L80 (hour)	>145,000


Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	16.8 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Accessories (To be ordered separately)

Anchor bolts



90AJ001

90AJ001

Project name				Type		Quantity	
Date		Note					

LB6047.552-US-T2-350-830-ONOFF-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[T2] Type II - 140x100°	[350] 28 W	[830] 3000 K CRI 80	[ONOFF] On/Off	<div> <div>[HM1]</div> <div>Black</div> <div></div> </div> <div> <div>[HM2]</div> <div>Dark gray</div> <div></div> </div> <div> <div>[HM3]</div> <div>Anthracite gray</div> <div></div> </div> <div> <div>[HM4]</div> <div>Light gray</div> <div></div> </div> <div> <div>[HM5]</div> <div>White</div> <div></div> </div> <div> <div>[HM6]</div> <div>Bronze</div> <div></div> </div> <div> <div>[CC]</div> <div>Custom color (Please specify RAL code)</div> <div></div> </div>
Extras	Accessories (<i>To be ordered separately</i>)			
Luminaire body options	Anchor bolts			
	[90AJ001] 90AJ001			
[DPC] Double powder coating				