



# DOMINO AFX 3 Module

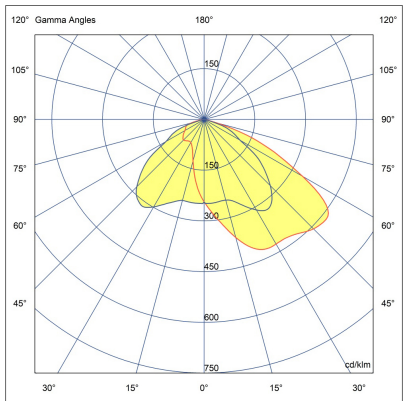

LP4034.863-US-T4-500-840

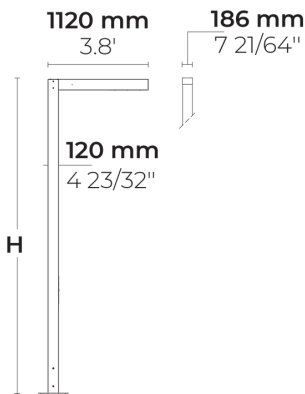

[T4]  
Type IV

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [T4] 117x64°  |
| Delivered lumens flux | 8795 lm       |
| Rated input power     | 72 W          |
| Color temperature     | 4000 K CRI 80 |
| Luminaire efficacy    | 117 lm/W      |
| Lamp                  | 48 LED        |
| Color Deviation       | 4 SDCM        |
| BUG rating            | B2-U0-G1      |
| Lifetime L90 (hour)   | >102,000      |
| Lifetime L80 (hour)   | >102,000      |

## Options

## Technical information

|                         |                                                                                                                       |
|-------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                                                                     |
| Housing                 | Corrosion resistant, marine grade aluminum housing                                                                    |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                                             |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                                          |
| Gasket                  | Liquid silicone                                                                                                       |
| Lens / Reflector        | PMMA lens with high optical efficiency                                                                                |
| Glass / Diffusor        | Tempered safety glass                                                                                                 |
| Impact protection       | IK08                                                                                                                  |
| Ingress protection      | IP66                                                                                                                  |
| Input voltage           | 120-277V 50/60Hz                                                                                                      |
| Insulation class        | Class I                                                                                                               |
| Weight                  | 154.66 lbs (13'), 165.88 lbs (16.5'), 177.1 lbs (20' )                                                                |
| LED module              | High power LEDs on metal-core PCB                                                                                     |
| Driver                  | Internal LED driver                                                                                                   |
| Driver surge protection | 10/6 kV                                                                                                               |
| Power factor            | > 0.95                                                                                                                |
| Through wiring          | Single power cord entry                                                                                               |
| Operating temperature   | -40...50°C                                                                                                            |
| Power cord              | 20" of outdoor use rated flexible power cord                                                                          |
| Pole detail             | Poles are supplied with flange plate. Flange cover and anchorage can be ordered separately. Embedded base is optional |

## Notes

3000K CCT or warmer must be selected to be DarkSky International certified.

# Poles (Included)

---

## Product specific poles with base plate



| Configuration code | Height | Diameter /<br>Dimensions | Spigot / End<br>diameter |
|--------------------|--------|--------------------------|--------------------------|
| PAFD.R01.T003-H4   | 13.1'  | 7.1x4.7"                 |                          |
| PAFD.R01.T003-H5   | 16.4'  | 7.1x4.7"                 |                          |
| PAFD.R01.T003-H6   | 19.7'  | 7.1x4.7"                 |                          |

| Project name |  |      |  | Type |  | Quantity |  |
|--------------|--|------|--|------|--|----------|--|
| Date         |  | Note |  |      |  |          |  |

LP4034.863-US-T4-500-840-\_\_-\_\_-\_\_-\_\_-\_\_-\_\_

| Light distribution                                                                                                                                                                                                                                            | Rated input power                                 | Color temperature                                                                                       | Control                  | Product colors                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------------------------------------------------------------|--------------------------|---------------------------------|
| <b>[T4]</b><br>Type IV - 117x64°                                                                                                                                                                                                                              | <b>[500]</b><br>72 W                              | <b>[840]</b><br>4000 K CRI 80                                                                           | <b>[ONOFF]</b><br>On/Off | <b>[HM1]</b><br>Black           |
| <b>[P4]</b><br>Pedestrian crosswalk distribution - 20x78°<br><br><b>[T1]</b><br>Type I - 111x48°<br><br><b>[T2]</b><br>Type II - 133x48°<br><br><b>[T2]</b><br>Type II - 149x54°<br><br><b>[T3]</b><br>Type III - 143x63°<br><br><b>[T5]</b><br>Type V - 117° | <b>[350]</b><br>50 W<br><br><b>[700]</b><br>100 W | <b>[827]</b><br>2700 K CRI 80<br><br><b>[830]</b><br>3000 K CRI 80<br><br><b>[740]</b><br>4000 K CRI 70 | <b>[0-10V]</b><br>0-10V  | <b>[HM2]</b><br>Dark gray       |
|                                                                                                                                                                                                                                                               |                                                   |                                                                                                         |                          | <b>[HM3]</b><br>Anthracite gray |
|                                                                                                                                                                                                                                                               |                                                   |                                                                                                         |                          | <b>[HM4]</b><br>Light gray      |
|                                                                                                                                                                                                                                                               |                                                   |                                                                                                         |                          | <b>[HM5]</b><br>White           |
|                                                                                                                                                                                                                                                               |                                                   |                                                                                                         |                          | <b>[HM6]</b><br>Bronze          |
| <b>[CC]</b><br>Custom color (Please specify RAL code)                                                                                                                                                                                                         |                                                   |                                                                                                         |                          |                                 |
| <b>Height</b>                                                                                                                                                                                                                                                 | <b>Extras</b>                                     |                                                                                                         |                          |                                 |
| <b>[H4]</b><br>13.1'<br><br><b>[H5]</b><br>16.4'<br><br><b>[H6]</b><br>19.7'<br><br><b>[HC]</b>                                                                                                                                                               | <b>Connectivity</b>                               |                                                                                                         |                          |                                 |
|                                                                                                                                                                                                                                                               | <b>[NM7]</b><br>7 Pin NEMA socket                 |                                                                                                         |                          |                                 |
|                                                                                                                                                                                                                                                               | <b>Consult the factory</b>                        |                                                                                                         |                          |                                 |
|                                                                                                                                                                                                                                                               | <b>[MS]</b><br>Motion sensor                      |                                                                                                         |                          |                                 |
|                                                                                                                                                                                                                                                               | <b>Luminaire body options</b>                     |                                                                                                         |                          |                                 |
| <b>[DPC]</b><br>Double powder coating                                                                                                                                                                                                                         |                                                   |                                                                                                         |                          |                                 |