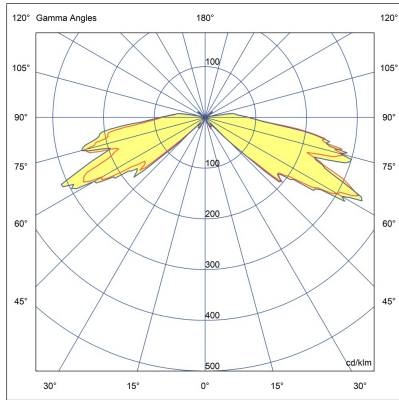



LB7032.693-EN-SYM-3L-700-740-ONOFF-EN-C1

**[SYM-3L]**Symmetric, Special
effect: 3 lines**Variant**


Light distribution	[SYM-3L] 165°
Delivered lumens flux	541 lm
Rated input power	10 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	54 lm/W
Lamp	1 LED
MacAdam Ellipse	5 SDCM
BUG rating	B1-U2-G1
ULOR	3.6
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options**Technical information**

Mounting	Surface mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK05
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.52 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.91
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.5 m of flexible cable

Accessories (To be ordered separately)

Anchorage



612J014

612J014

Project name		Type		Quantity	
Date		Note			
LB7032.693-EN-SYM-3L-700-740-ONOFF-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SYM-3L] Symmetric, Special effect: 3 lines - 165°	[700] 10 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black	
[SYM-3L] Symmetric, Special effect: 3 lines - 360x165°		[827] 2700 K CRI 80		[HM2] Dark grey	
		[830] 3000 K CRI 80		[HM3] Anthracite grey	
		[840] 4000 K CRI 80		[HM4] Light grey	
				[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)			
[H0.30] 30cm	Luminaire body options	Anchorage			
	[DPC] Double powder coating	[612J014] 612J014			
[HC]					