
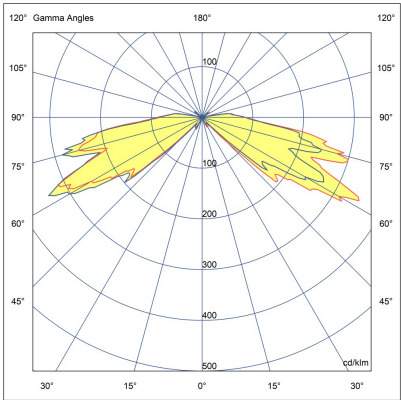


LB7032.693-US-SYM-3L-700-740



[SYM-3L]  
Symmetric, Special  
effect: 3 lines

### Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [SYM-3L] 165° |
| Delivered lumens flux | 541 lm        |
| Rated input power     | 10 W          |
| Color temperature     | 4000 K CRI 70 |
| Luminaire efficacy    | 54 lm/W       |
| Lamp                  | 1 LED         |
| Color Deviation       | 5 SDCM        |
| BUG rating            | B1-U2-G1      |
| ULOR                  | 3.6           |
| Lifetime L90 (hour)   | >72,600       |
| Lifetime L80 (hour)   | >72,600       |


### Options

### Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                         |
| Housing                 | Corrosion resistant, marine grade aluminum housing                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating                                        |
| Glass / Diffusor        | Custom Design PMMA Diffusor                                               |
| Impact protection       | IK05                                                                      |
| Ingress protection      | IP65                                                                      |
| Input voltage           | 120-277V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 5.5 lbs                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 4/2 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single power cord entry                                                   |
| Operating temperature   | -40...50°C                                                                |
| Power cord              | 20" of outdoor use rated flexible power cord                              |

Accessories (To be ordered separately)

Anchor bolts



612J014  
612J014

|                                          |  |  |      |  |      |  |          |  |
|------------------------------------------|--|--|------|--|------|--|----------|--|
| Project name                             |  |  |      |  | Type |  | Quantity |  |
| Date                                     |  |  | Note |  |      |  |          |  |
| LB7032.693-US-SYM-3L-700-740-__-__-__-__ |  |  |      |  |      |  |          |  |

| Light distribution                                       | Rated input power                 | Color temperature                                                                  | Control           | Product colors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [SYM-3L]<br>Symmetric, Special<br>effect: 3 lines - 165° | [700]<br>10 W                     | [740]<br>4000 K CRI 70                                                             | [ONOFF]<br>On/Off | [HM1]<br>Black                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                                                          |                                   | [827]<br>2700 K CRI 80<br><br>[830]<br>3000 K CRI 80<br><br>[840]<br>4000 K CRI 80 | [0-10V]<br>0-10V  | [HM2]<br>Dark gray <br><br>[HM3]<br>Anthracite gray <br><br>[HM4]<br>Light gray <br><br>[HM5]<br>White <br><br>[HM6]<br>Bronze <br><br>[CC] <br>Custom color (Please<br>specify RAL code) |
| Height                                                   | Extras                            | Accessories ( <i>To be<br/>ordered separately</i> )                                |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| [H0.30]<br>0.9'<br><br>[HC]                              | Luminaire body<br>options         | Anchor bolts                                                                       |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                                                          | [DPC]<br>Double powder<br>coating | [612J014]<br>612J014                                                               |                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |