
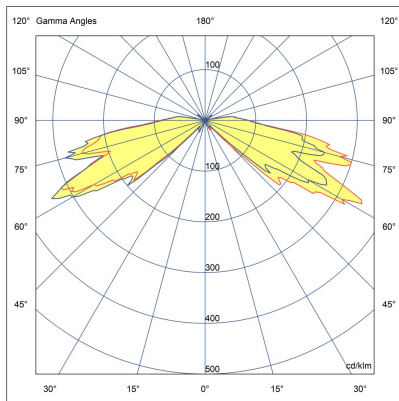




LB7032.693-US-SYM-3L-700-830-UNI-C1

PHASED-  
OUT

[SYM-3L]

Symmetric, Special  
effect: 3 lines

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [SYM-3L] 165° |
| Delivered lumens flux  | 451 lm        |
| Rated input power      | 10 W          |
| Colour temperature     | 3000 K CRI 80 |
| Luminaire efficacy     | 45 lm/W       |
| Lamp                   | 1 LED         |
| MacAdam Ellipse        | 5 SDCM        |
| BUG rating             | B1-U2-G1      |
| ULOR                   | 3.5           |
| Lifetime L90B50 (hour) | >72,600       |
| Lifetime L80B50 (hour) | >72,600       |

## Options


## Technical information

|                         |                                                                           |
|-------------------------|---------------------------------------------------------------------------|
| Mounting                | Surface mountable                                                         |
| Housing                 | Corrosion resistant, marine grade aluminum housing                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                  | Silicone                                                                  |
| Lens / Reflector        | High reflectance aluminium coating                                        |
| Glass / Diffusor        | Custom Design PMMA Diffusor                                               |
| Impact protection       | IK05                                                                      |
| Ingress protection      | IP65                                                                      |
| Input voltage           | 120-277V 50/60Hz                                                          |
| Insulation class        | Class I                                                                   |
| Weight                  | 5.5 lbs                                                                   |
| LED module              | Multi-chip high power LEDs on metal-core PCB                              |
| Driver                  | Internal LED driver                                                       |
| Driver surge protection | 4/2 kV                                                                    |
| Power factor            | > 0.90                                                                    |
| Through wiring          | Single cable entry                                                        |
| Operating temperature   | -40...50°C                                                                |
| Cable                   | 0.5 m of flexible cable                                                   |

## Accessories (To be ordered separately)

---

### Anchorage



**612J014**

612J014

|                                                 |  |      |  |          |  |
|-------------------------------------------------|--|------|--|----------|--|
| Project name                                    |  | Type |  | Quantity |  |
| Date                                            |  | Note |  |          |  |
| LB7032.693-US-SYM-3L-700-830-__-UNI-C1-__-__-__ |  |      |  |          |  |

| Light distribution                                       | Rated input power                 | Colour temperature                                  | Control           | Product colours                                    |
|----------------------------------------------------------|-----------------------------------|-----------------------------------------------------|-------------------|----------------------------------------------------|
| [SYM-3L]<br>Symmetric, Special<br>effect: 3 lines - 165° | [700]<br>10 W                     | [830]<br>3000 K CRI 80                              | [ONOFF]<br>On/Off | [HM1]<br>Black                                     |
|                                                          |                                   | [827]<br>2700 K CRI 80                              | [0-10V]<br>0-10V  | [HM2]<br>Dark grey                                 |
|                                                          |                                   | [740]<br>4000 K CRI 70                              |                   | [HM3]<br>Anthracite grey                           |
|                                                          |                                   | [840]<br>4000 K CRI 80                              |                   | [HM4]<br>Light grey                                |
|                                                          |                                   |                                                     |                   | [HM5]<br>White                                     |
|                                                          |                                   |                                                     |                   | [HM6]<br>Bronze                                    |
|                                                          |                                   |                                                     |                   | [CC]<br>Custom colour (Please<br>specify RAL code) |
| Height                                                   | Extras                            | Accessories ( <i>To be<br/>ordered separately</i> ) |                   |                                                    |
| [H0.30]<br>30cm<br><br>[HC]                              | Luminaire body<br>options         | Anchorages                                          |                   |                                                    |
|                                                          | [DPC]<br>Double powder<br>coating | [612J014]<br>612J014                                |                   |                                                    |