


LF8008.504-EN-M-350-830-ONOFF-EN-C1



PHASED-OUT

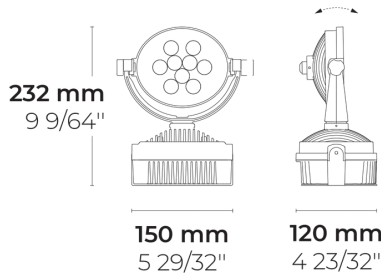

[M]
Medium

Variant








Light distribution	[M]
Delivered lumens flux	500 lm
Rated input power	11 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	45 lm/W
Lamp	9 LED
MacAdam Ellipse	3 SDCM

Options

Technical information

Tilt angle	+15°/-15°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.15 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Cable	0.4 m of flexible cable

Project name		Type		Quantity
Date		Note		
LF8008.504-EN-M-350-830-ONOFF-EN-C1-__-__				

Light distribution	Rated input power	Colour temperature	Control	Product colours
[M] Medium	[350] 11 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1]  Black
		[740] 4000 K CRI 70		[HM2]  Dark grey
				[HM3]  Anthracite grey
				[HM4]  Light grey
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom colour (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				