


LF8008.504-EN-M-350-830-ONOFF



PHASED-OUT

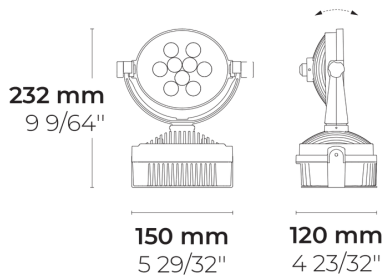

[M]
Medium - NEMA
Type 4

Configuration

Light distribution	[M]
Delivered lumens flux	500 lm
Rated input power	11 W
Color temperature	3000 K CRI 80
Luminaire efficacy	45 lm/W
Lamp	9 LED
Color Deviation	3 SDCM








Options

Technical information

Tilt angle	+15°/-15°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.15 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Power cord	16" of flexible power cord

Project name		Type		Quantity	
Date		Note			

LF8008.504-EN-M-350-830-ONOFF-__-__

Light distribution	Rated input power	Color temperature	Control	Product colors
[M] Medium - NEMA Type 4	[350] 11 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1]  Black
		[740] 4000 K CRI 70		[HM2]  Dark gray
				[HM3]  Anthracite gray
				[HM4]  Light gray
				[HM5]  White
				[HM6]  Bronze
				[CC]  Custom color (Please specify RAL code)
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				