




DOMINO W AFX 2 Module



IK08 IP66



LW7031.862-EN-P4-500-830-EN-C1

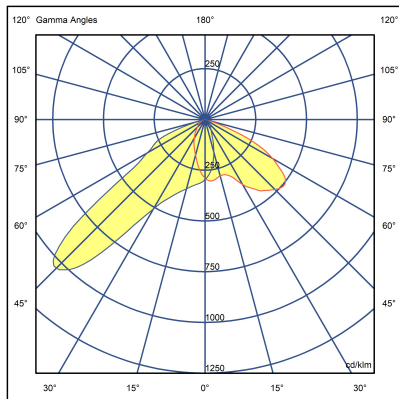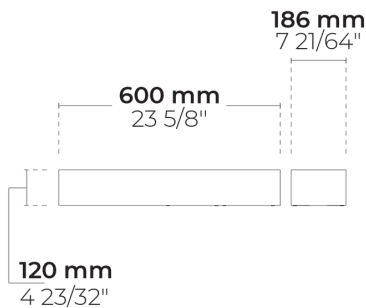

[P4]

Special pedestrian
road distribution-
right side traffic

Variant

Light distribution	[P4] 20x78°
Delivered lumens flux	5830 lm
Rated input power	48 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	121 lm/W
Lamp	32 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Mounting	Surface or wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.75 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	20*16*100 cm

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 08.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LW7031.862-EN-P4-500-830-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[P4] Special pedestrian road distribution-right side traffic - 20x78°	[500] 48 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black 
[T1] Type I, Asymmetric, Side throw - 111x48°	[350] 34 W	[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey 
[T2] Type II, Asymmetric, Side throw - 133x48°	[700] 67 W	[740] 4000 K CRI 70	[AUTO] AutoDIM	[HM3] Anthracite grey 
[T2] Type II, Asymmetric, Side throw - 149x54°		[840] 4000 K CRI 80	[STEP] StepDIM	[HM4] Light grey 
[T3] Type III, Asymmetric, Side throw - 143x63°				[HM5] White 
[T4] Type IV, Asymmetric, Forward throw - 117x64°				[HM6] Bronze 
[T5] Type V, Symmetric - 117°				[CC] Custom colour (Please specify RAL code) 
Extras				
Light output				
[BS] Backlight Shield				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				