PRIFMA W AFX 2 Module

IK08 IP66

LW2042.862-EN-P4-700-830-EN-C1

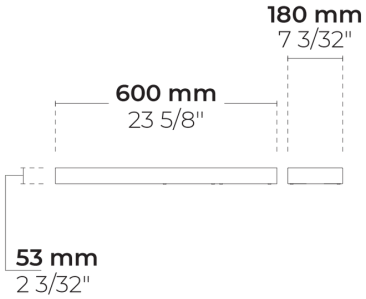

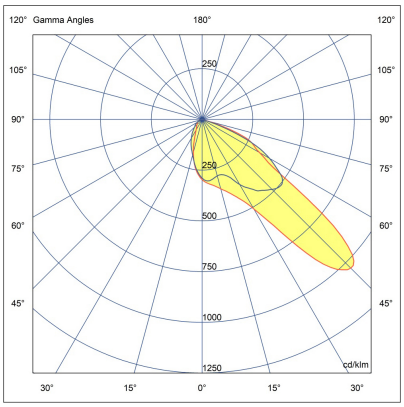



[P4]
Special pedestrian road distribution-right side traffic

Variant

Light distribution	[P4] 20x78°
Delivered lumens flux	7545 lm
Rated input power	67 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	112 lm/W
Lamp	32 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U1-G1
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.3 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/4 kV
Power factor	> 0.98
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Packing box dimensions	19*8*62 cm

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675 Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			

LW2042.862-EN-P4-700-830-__-EN-C1-__-__-__-__

Light distribution	Rated input power	Colour temperature	Control	Product colours
[P4] Special pedestrian road distribution-right side traffic - 20x78°	**[700]** 67 W	**[830]** 3000 K CRI 80	**[ONOFF]** On/Off	**[HM1]** Black
[T1] Type I, Asymmetric, Side throw - 111x48°	**[350]** 34 W	**[827]** 2700 K CRI 80	**[DALI]** DALI	**[HM2]** Dark grey
[T2] Type II, Asymmetric, Side throw - 133x48°	**[500]** 48 W	**[740]** 4000 K CRI 70		**[HM3]** Anthracite grey
[T2] Type II, Asymmetric, Side throw - 149x54°		**[840]** 4000 K CRI 80		**[HM4]** Light grey
[T3] Type III, Asymmetric, Side throw - 143x63°				**[HM5]** White
[T4] Type IV, Asymmetric, Forward throw - 117x64°				**[HM6]** Bronze
[T5] Type V, Symmetric - 117°				**[CC]** Custom colour (Please specify RAL code)

Extras
Light output
[BS] Backlight Shield
[CLO] Constant light output
Consult the factory
[UNI] 120-277V 50/60Hz
Luminaire body options
[DPC] Double powder coating

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675 Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.