



HANDRA Side - Ø48 mm

CE UK CA IK10 IP65

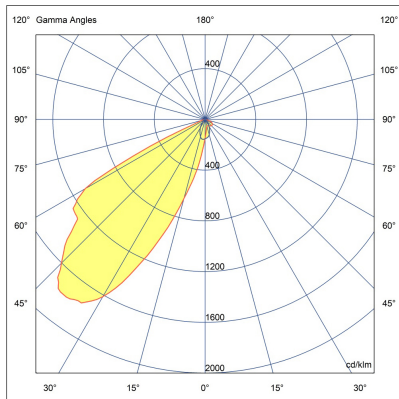

LH5005.595-EN-SLSH-350-740-CC-3V-350-C3

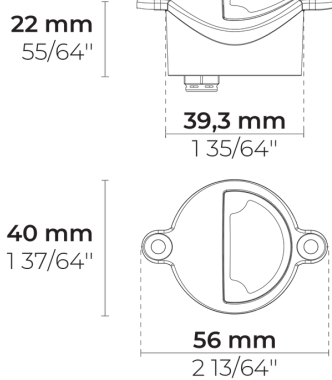

[SLSH]

Special linear, Side throw

Variant

Light distribution	[SLSH] 42x54°
Delivered lumens flux	48 lm
Rated input power	1 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	48 lm/W
Lamp	1 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information




Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.05 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	7*7*7 cm
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com









HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 05.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Mounting accessories	Mounting accessories	Mounting accessories
		
DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules	DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules	DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules
007502063	007502064	007502065

Project name		Type		Quantity	
Date		Note			
LH5005.595-EN-SLSH-350-740-__-CC-3V-350-C3-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLSH] Special linear, Side throw - 42x54° 	[350] 1 W	[740] 4000 K CRI 70 [827] 2700 K CRI 80 [830] 3000 K CRI 80 [840] 4000 K CRI 80	[ONOFF] On/Off [DALI] DALI	[HM1]  Black [HM2]  Dark grey [HM3]  Anthracite grey [HM4]  Light grey [HM5]  White [HM6]  Bronze [CC]  Custom colour (Please specify RAL code)
Accessories (To be ordered separately)				
Mounting accessories				
[007502063] DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules				
[007502064] DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules				
[007502065] DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules				